


## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

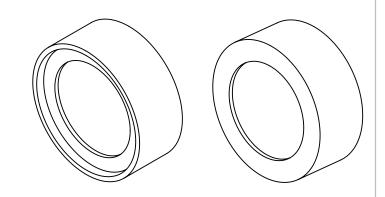





<b>→</b>	$-5.00_{\pm 0.10}$
	0.0010.10
	Ì

REV. 001	VALUE
CENTER WAVELENGTH (CWL)	640 ± 2nm
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm
MINIMUM TRANSMISSION	≥85%
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A, SECT. 3.4.1
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

			Edmund Optic	S®
THIRD ANGLE _ PROJECTION		TITLE	OD4, Ø12.5mm, 640nm x 10nm, HC, BP	FILTER
ALL DIMS IN	mm	DWG NO	65107	SHEET 1 OF 1