


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

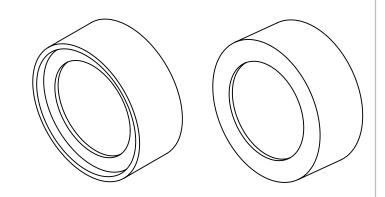

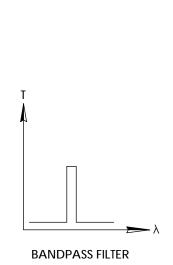

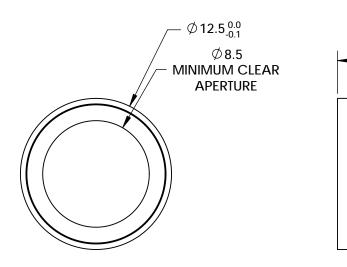

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. 001	VALUE		
CENTER WAVELENGTH (CWL)	940 ± 2nm		
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm		
MINIMUM TRANSMISSION	≥85%		
BLOCKING	200 - 1200nm		
SURFACE QUALITY	80-50		
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING		
COATING TYPE	HARD COATED		
DURABILITY	MIL-C-48497A, SECT. 3.4.1		
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4		

			Edmund Optic	S [®]
THIRD ANGLE _ PROJECTION	$\phi \Leftrightarrow$	TITLE	OD4, Ø12.5mm, 940nm x 10nm, HC, BP	FILTER
ALL DIMS IN	mm	DWG NO	65124	SHEET 1 OF 1

 $+5.00_{\pm0.10}$