

NOTES:

- 1. ALLOWABLE OPTICAL MATERIAL: FUSED SILICA CORNING 7980
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
- 3. COATING (APPLY ACROSS COATING APERTURE)
 \$1: NONE
 \$2: NONE

4. SIX SIDEWALLS:

SURFACE ACCURACY: COMMERCIAL POLISH



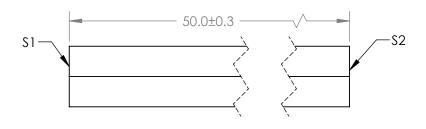

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

| | \$1 | \$2 | | |
|-----------------------------|---------|---------|---------------------|----|
| SHAPE | PLANO | PLANO | EFL (AT 587.6nm) | NA |
| SURFACE ACCURACY AT 632.8nm | 1 WAVE | 1 WAVE | BFL (AT 587.6nm) | NA |
| SURFACE QUALITY | 60 - 40 | 60 - 40 | ALL DIMS IN | mm |

| ® | | |
|------------|--------|---------|
| e n | Edmund | Ontics® |
| UU | | Optios |

| TITLE | 4mm HEX LIGHT PIPE, 50mm lg |
|--------|-----------------------------|
| DWG NO | 63093 |