NOTES:

END DENSITY

OPTICAL DENSITY

0.04

SHAPE

BEVEL

SURFACE QUALITY


D/2

REV A

0 POSITION

PROTECTIVE AS NEEDED

- 1. SUBSTRATE
- 2. SURFACE \$1 IS TO BE PARALLEL TO SURFACE \$2 WITHIN 3 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) WAVELENGTH RANGE: 400 700nm
- 4. FINE GRIND SURFACE
- 5. POWER IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT

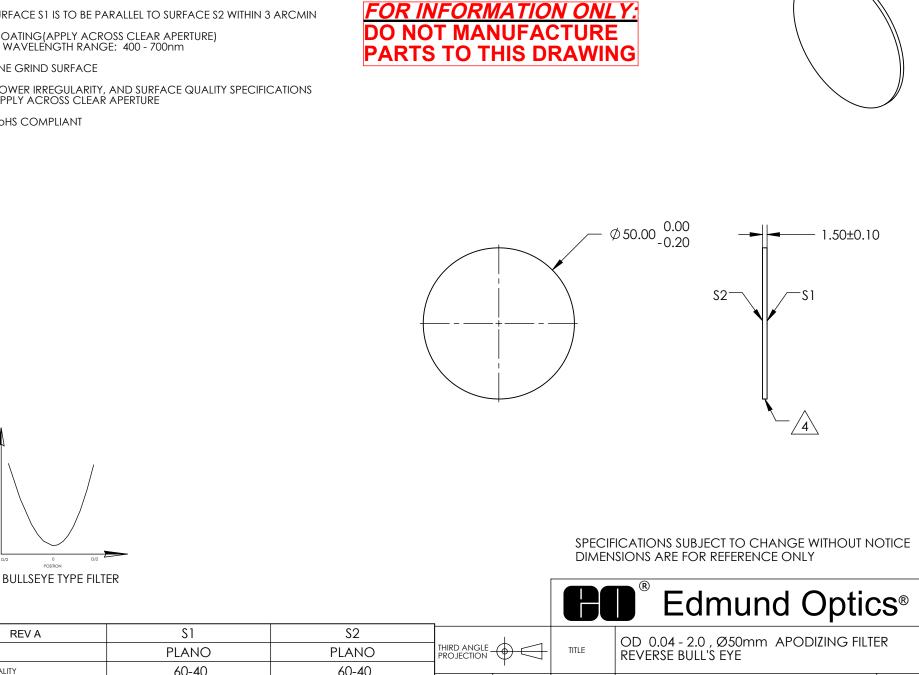

ALL DIMS IN

PROTECTIVE AS NEEDED

mm

DWG NO

64392

SHEET

1 OF 1