
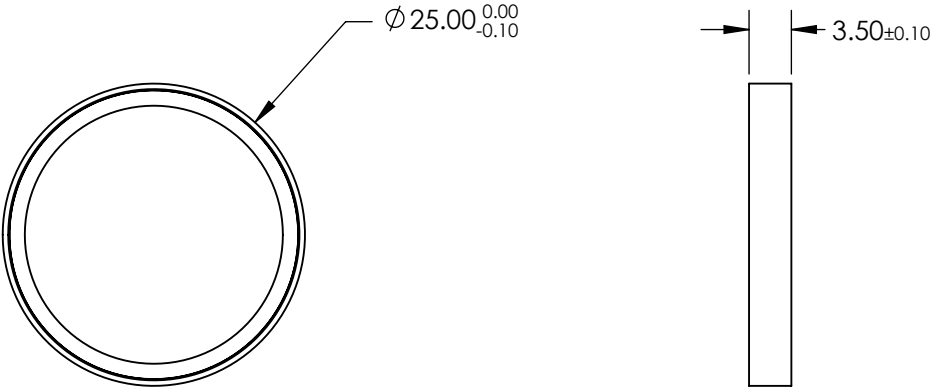


NOTES:

1. SUBSTRATE
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 10 ARCSEC
3. COATING (APPLY ACROSS CLEAR APERTURE)
PHYSICAL DURABILITY: MIL-C-48497A
ENVIRONMENTAL DURABILITY: MIL-STD-810F
Tavg ≥93% @ 1077.8 - 2000nm
4. FINE GROUND SURFACE
5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY
ACROSS CLEAR APERTURE
6. TRANSMITTED WAVEFRONT DISTORTION RMS @ <λ/4 @ 633nm
7. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	<div><div><div><div><div></div></div></div><div><div></div></div></div><div>THIRD ANGLE PROJECTION</div><div><div>Edmund Optics®</div><div>Edmund Optics®</div></div></div>			
SHAPE	PLANO	PLANO				
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	>80%	>80%				
REJECTION WAVELENGTH	831 - 1064	831 - 1064				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED				
			ALL DIMS IN	mm	TITLE	Ø25mm, 1074.6nm, RAMAN EDGE FILTER
			DWG NO	86249	SHEET 1 OF 1	