


NOTES:


1. Substrate
2. CLEAR APERTURE AND COATING APERTURE ARE CENTERED ON SURFACES
3. COATING (APPLY ACROSS COATING APERTURE)  
S1: Ravg ≥ 95% @ 400 - 690nm @ 45° AOI  
Tavg ≥ 90% @ 750 - 1200nm @ 45° AOI  
S2: AR Coating: Ravg <1% @ 700 - 1150nm@ 45° AOI

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**





4. FINE GRIND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
6. RoHS COMPLIANT

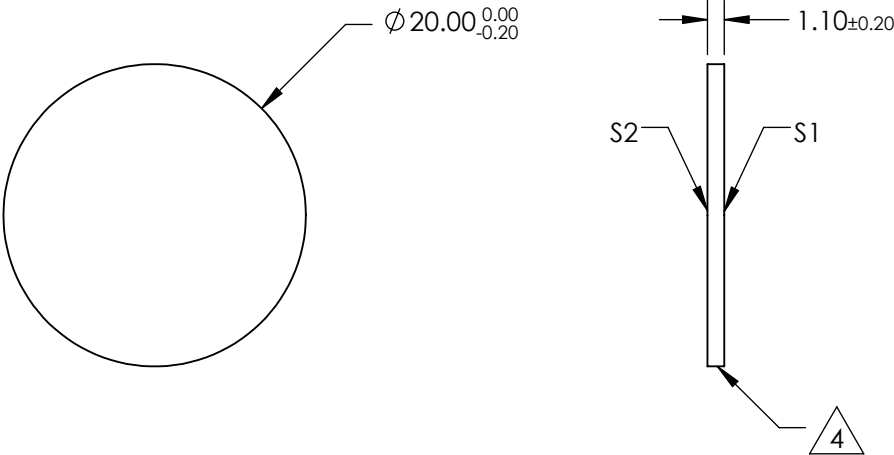

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®			
SHAPE	PLANO	PLANO		TITLE	Ø20mm, 45° AOI, COLD MIRROR	
SURFACE FLATNESS	4 - 6λ	4 - 6λ		DWG NO	64445	SHEET 1 OF 1
SURFACE QUALITY	80-50	80-50				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm		