



FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING



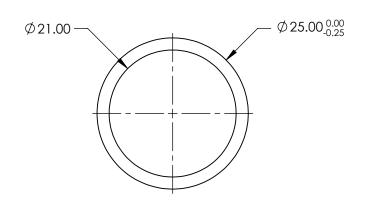





	VALUE
OPTICAL DENSITY	≥4.0
CENTER WAVELENGTH (CWL)	300 +10.0/-0.0 nm
FULL WIDTH HALF MAX (FWHM)	40 ±8 nm
MINIMUM TRANSMISSION	>20 %
BLOCKING	200 - 10000nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED RING
COATING TYPE	TRADITIONAL COATED

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

_					
	THIRD ANGLE PROJECTION	\rightarrow	TITLE	Ø25mm, 300nm x 40nm, MOUNTED BANDPASS FILTER	
	ALL DIMS IN	mm	DWG NO	67817	SHEET 1 OF 1