





NOTES:

- 1. SUBSTRATE: Float Glass
- 2. COATING (APPLY ACROSS CLEAR APERTURE)
  - S1: Protected Aluminum (400-700nm)
  - R(AVG) >85% @ 400 - 700nm @ 45°
  - S2: NONE
- 3. SEAMED EDGES
- 4. RoHS COMPLIANT

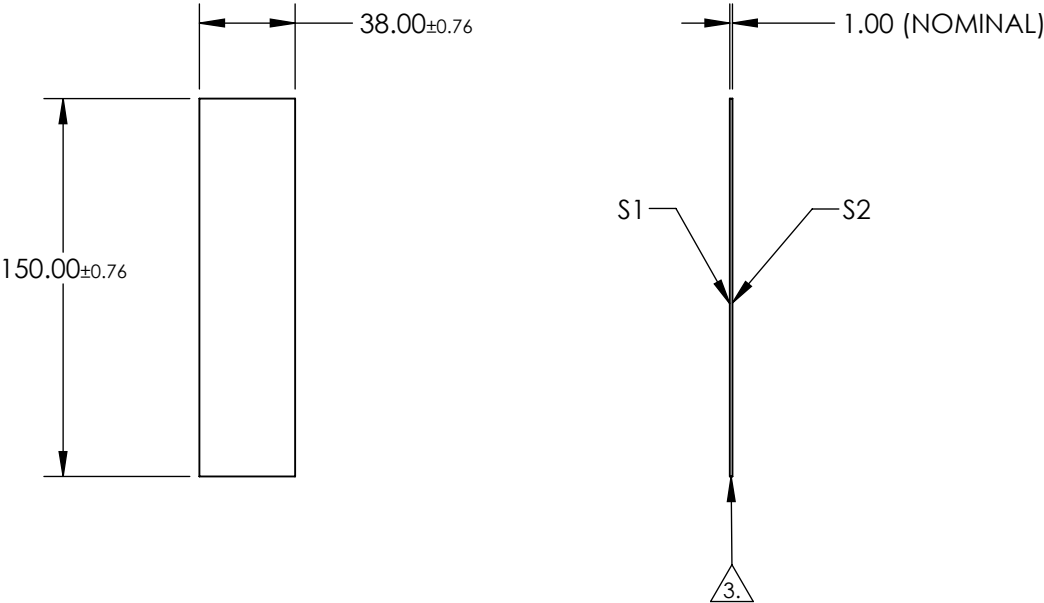

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

|                  |                     |                     |  |   |        |                         |
|------------------|---------------------|---------------------|--|---|--------|-------------------------|
|                  | S1                  | S2                  |  Edmund Optics® |   |        |                         |
| SHAPE            | PLANO               | PLANO               |                 |   |        |                         |
| SURFACE QUALITY  | 80-50               | N/A                 |  |   |        |                         |
| SURFACE FLATNESS | 4 - 6λ              | N/A                 | THIRD ANGLE<br>PROJECTION  |  | TITLE  | 38 x 150mm, 4-6λ Mirror |
| CLEAR APERTURE   | Ø 34.2 x 135        | N/A                 |  |   | DWG NO | 32442                   |
| BEVEL            | PROTECTED AS NEEDED | PROTECTED AS NEEDED |  |   |        | SHEET<br>1 OF 1         |
|                  |                     |                     | ALL DIMS IN  | mm  |        |                         |