




NOTES:

1. SUBSTRATE: FLOAT GLASS
2. WAVELENGTH RANGE: 400 - 700 nm

3. FINE GRIND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS  
APPLY ACROSS CLEAR APERTURE
5. ROHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

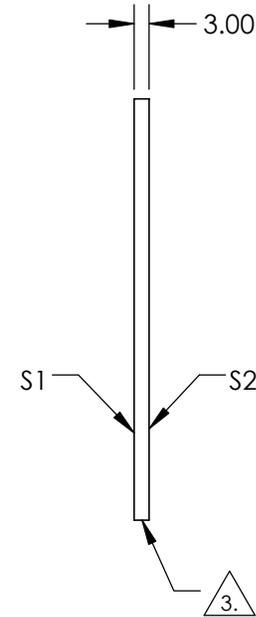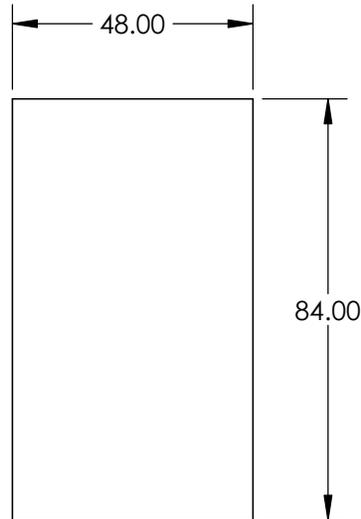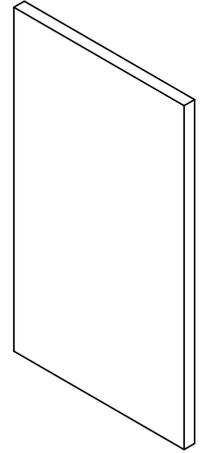

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® **Edmund Optics**®

|                  |        |        |                        |  |             |  |        |
|------------------|--------|--------|------------------------|--|-------------|--|--------|
|                  | S1     | S2     | THIRD ANGLE PROJECTION |  | TITLE       | 48 x 84mm AR COATED FLOAT GLASS WINDOW |        |
| SHAPE            | PLANO  | PLANO  |                        |  | ALL DIMS IN | mm                                     | DWG NO |
| SURFACE FLATNESS | 4 - 6λ | 4 - 6λ |                        |  |             |  |        |
| COATING          | VIS    | VIS    |                        |  |             |  |        |