## NOTES:


- SUBSTRATE: Float Glass
- 2. COATING (APPLY ACROSS CLEAR APERTURE) \$1: Protected Aluminum (400-700nm) R(AVG) >85% @ 400 - 700nm @ 45°


S2: NONE



SEAMED EDGES

Rohs Compliant

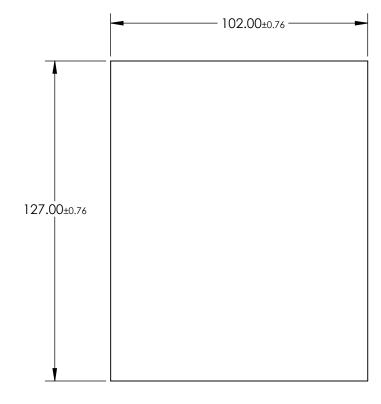

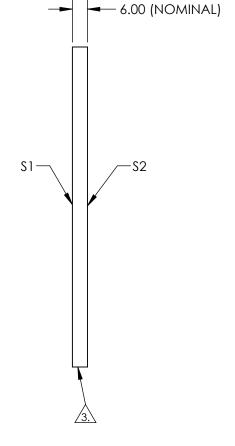

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	\$1 PLANO	\$2 PLANO				<b>Edmund Optic</b>	S®
SURFACE QUALITY	80-50	N/A		1		102 x 127mm, 4-6λ Mirror	
SURFACE FLATNESS	4 - 6λ	N/A	THIRD ANGLE PROJECTION		TITLE	102 X 12711111, 4 0X WIIITOT	
CLEAR APERTURE	Ø91.8 x 114.3	N/A		ı			CLIEFT
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	40042	SHEET 1 OF 1