
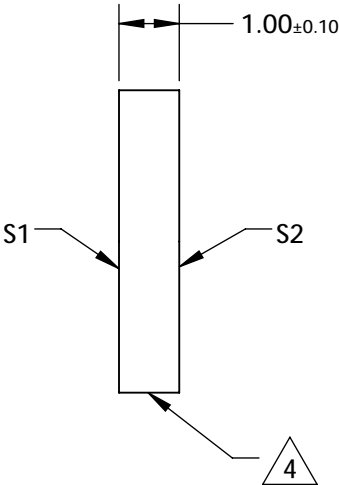
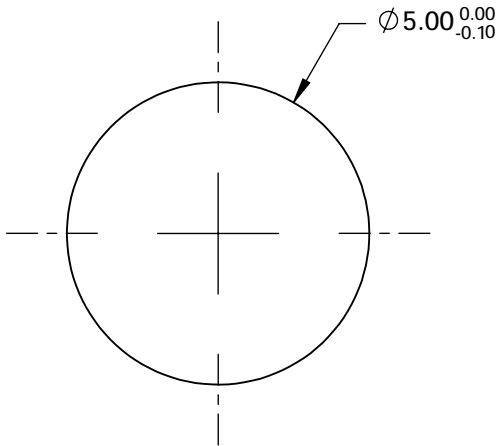


NOTES:

- 1. SUBSTRATE: UV GRADE FUSED SILICA
- 2. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: RABS ≤1.0% @ 250 - 425nm
RAVG ≤0.75% @ 250 - 425nm
RAVG ≤0.5% @ 370 - 420nm
- 3. SURFACE S2 TO BE PARALLEL WITH S1 TO WITHIN <5 ARCSEC



△ 4 FINE GRIND SURFACE

- 5. RoHS COMPLIANT

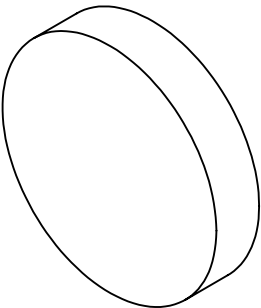

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | | | | | | |
|-----------------|----------------------|----------------------|--|--------|---|-----------------|
| | S1 | S2 |  Edmund Optics® | | | |
| SHAPE | PLANO | PLANO |  | TITLE | 5mm DIA., 1mm THICK, UV-AR COATED λ/10 FUSED SILICA WINDOW | |
| SURFACE QUALITY | 20-10 | 20-10 | | DWG NO | 65870 | SHEET 1 OF 1 |
| CLEAR APERTURE | Ø4.00 | Ø4.00 | | | | |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | ALL DIMS IN mm | | | |