
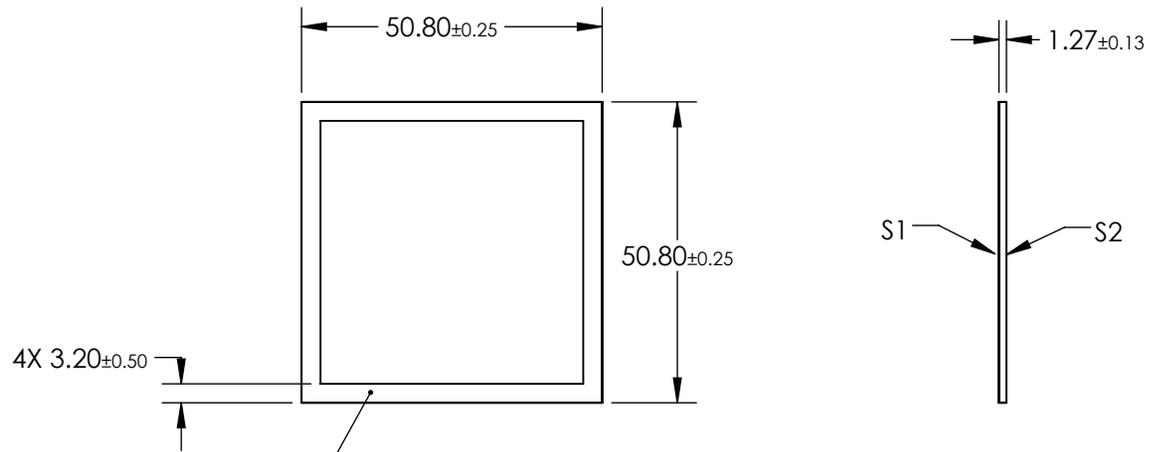


NOTES:

1. SUBSTRATE:  
PET
2. COATING (APPLY ACROSS CLEAR APERTURE)  
S1: Ravg <1% @450 - 650nm  
S2: CLEAR HARD COATED
3. RoHS COMPLIANT

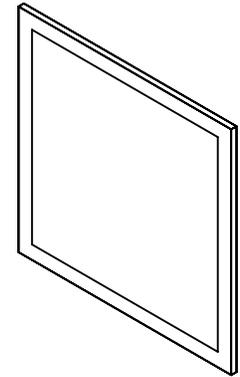

SILVER CONDUCTIVE "L" BUSS  
TO REAR, ALL AROUND

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

	S1	S2
SHAPE	PLANO	PLANO
WAVELENGTH RANGE	450 - 650nm	450 - 650nm
SURFACE RESISTIVITY (Ω/Sq)	8	8
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS IN mm

TITLE

2" x 2", ITO COATED EMI SHIELDED PLASTIC WINDOW

DWG NO

83744

SHEET 1 OF 1