
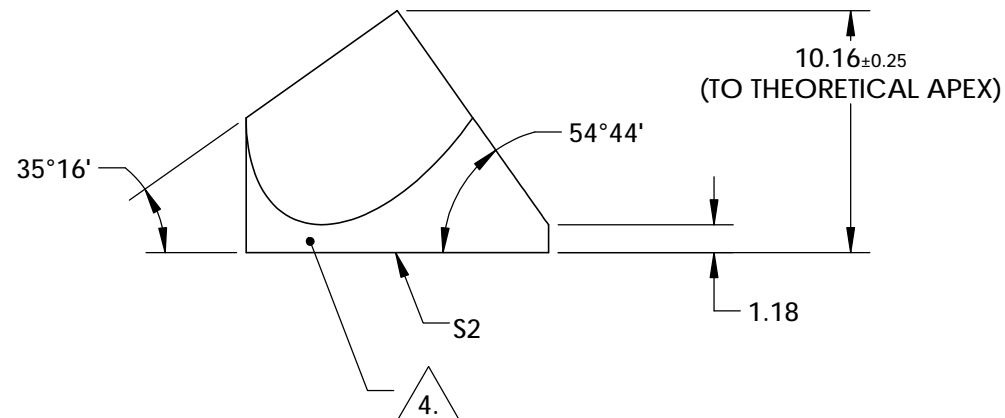



NOTES:

1. SUBSTRATE : FUSED SILICA
2. BLACK OVERPAINT IS 30-60 μm THICK
3. COATING (APPLY ACROSS COATING APERTURE)
S1: ALUMINUM WITH PROTECTED OVERCOAT
R(AVG)>85% FROM 400-700nm, @ 45° AOI



S2: UNCOATED

4. FINE GRIND SURFACE
5. ROHS COMPLIANT

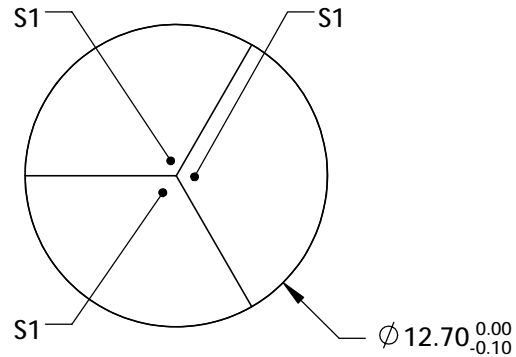

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV A	S1 & S2	<div>THIRD ANGLE PROJECTION</div> 		<div> Edmund Optics®</div>		<div>12.7mm ALUMINUM COATED, FUSED SILICA CORNER CUBE</div>	
SURFACE FLATNESS	$\lambda/10$						
SURFACE QUALITY	20-10						
WAVELENGTH RANGE	400 - 700 nm						
ANGLE TOL. (arcsec)	5						
BEVEL	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	49013	SHEET 1 OF 1	