
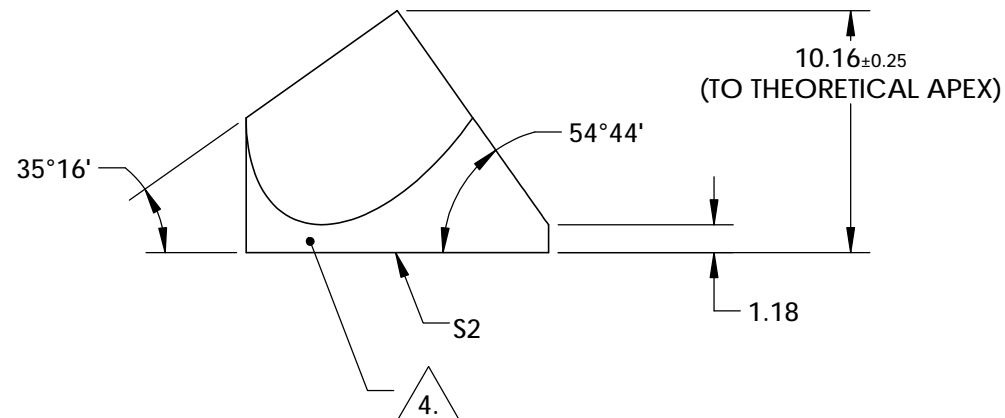



NOTES:

1. SUBSTRATE : FUSED SILICA
2. BLACK OVERPAINT IS 30-60  $\mu\text{m}$  THICK
3. COATING (APPLY ACROSS COATING APERTURE)  
S1: ALUMINUM WITH PROTECTED OVERCOAT (BLACK OVERPAINT)  
R(AVG)>85% FROM 400-700nm, @ 45° AOI



S2: UNCOATED

4. FINE GRIND SURFACE
5. ROHS COMPLIANT
6. CLEAR APERTURE (%): 90

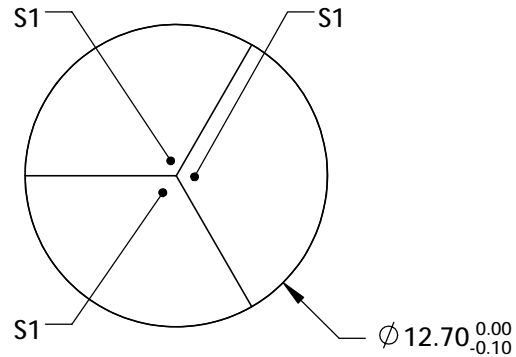

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV A	S1 & S2	 <b>Edmund Optics®</b>		
SURFACE FLATNESS	$\lambda/10$			
SURFACE QUALITY	20-10		TITLE	12.7mm ALUMINUM COATED, FUSED SILICA CORNER CUBE
WAVELENGTH RANGE	400 - 700 nm		DWG NO	49013
ANGLE TOL. (arcsec)	5	ALL DIMS IN	mm	SHEET 1 OF 1
BEVEL	PROTECTED AS NEEDED			