


- 1. SUBSTRATE: Float Glass
- 2. COATING (APPLY ACROSS CLEAR APERTURE) S1: Protected Aluminum (400-700nm) R(AVG) >85% @ 400 - 700nm @ 45°

S2: NONE

## 3. SEAMED EDGES

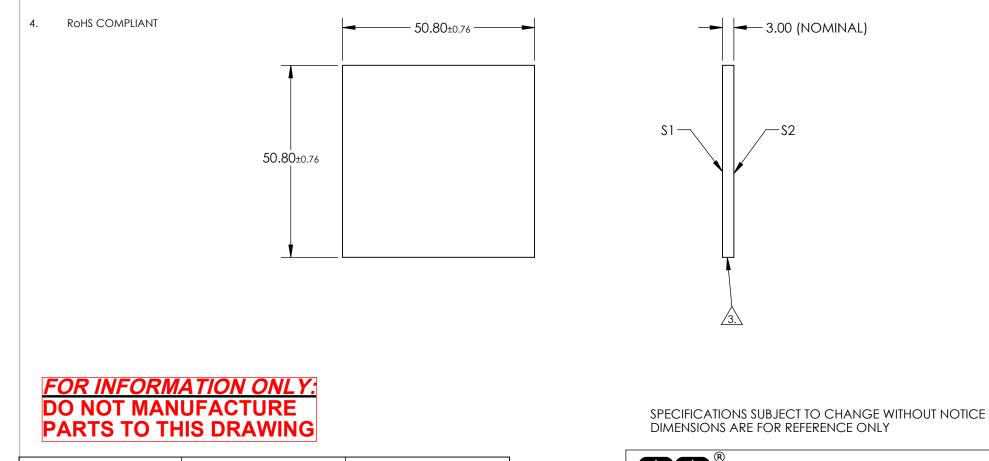

	S1	\$2				Edmund Optic	<b>C</b> ®
SHAPE	PLANO	PLANO					<i>,</i> 3
SURFACE QUALITY	80-50	N/A				50.8 x 50.8mm, 4-6λ Mirror	
SURFACE FLATNESS	4 - 6λ	N/A	THIRD ANGLE		TITLE	00.0 × 00.01111, 4 0X WINO	
CLEAR APERTURE	Ø 45.72 x 45.72	N/A					CULLET
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69250	SHEET 1 OF 1