
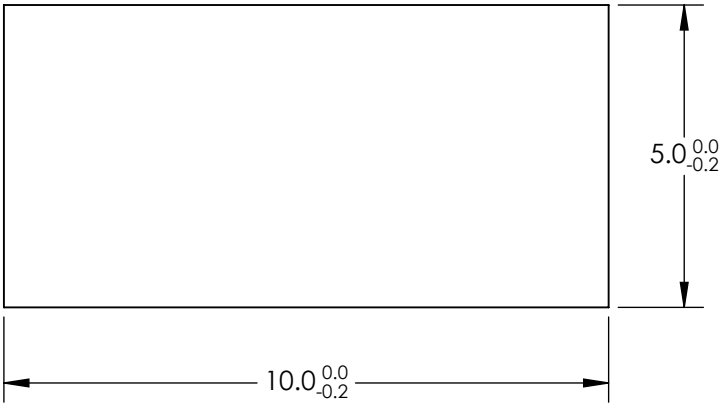



NOTES:

- 1. SUBSTRATE MATERIAL:
N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)



S1 & S2: NIR I

 $R(avg) \leq 0.5\% @ 600 - 1050nm$
- 3. FINE GROUND SURFACE
- 4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. RoHS COMPLIANT

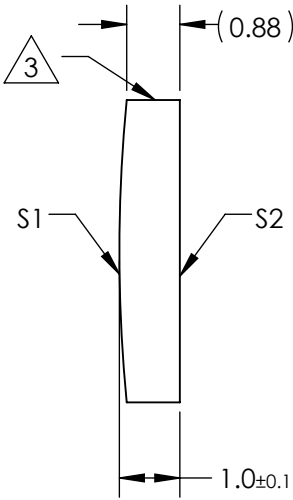

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®						
SHAPE	CONVEX	PLANO						EFL	50
RADIUS	25.8	∞	BFL	49.34					
SURFACE QUALITY	60-40	60-40	TITLE						
CLEAR APERTURE	9.00 X 4.00	9.00 X 4.00			THIRD ANGLE PROJECTION				
COATING APERTURE	9.00 X 4.00	9.00 X 4.00							
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69706		SHEET 1 OF 1	