

NOTES:

1. SUBSTRATE: SODA LIME FLOAT GLASS
2. COATING (APPLY ACROSS COATING APERTURE)




S1 & S2:

EXTINCTION RATIO: $T_p/T_s > 100000:1$ FROM 660 - 750nm
 TRANSMISSION: $TP > 84\%$ FROM 660 - 750nm

EXTINCTION RATIO: $T_p/T_s > 10000:1$ FROM 600 - 850nm
 TRANSMISSION: $TP > 84\%$ FROM 600 - 850nm

EXTINCTION RATIO: $T_p/T_s > 1000:1$ FROM 600 - 1000nm
 TRANSMISSION: $TP > 84\%$ FROM 600 - 1000nm

3. BEAM DEVIATION: < 1 arcmin
4. WAVEFRONT DISTORTION: $< 1/4$ WAVE @ 633nm
5. RoHS COMPLIANT

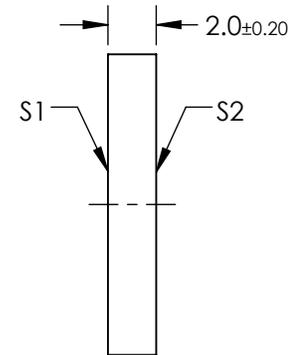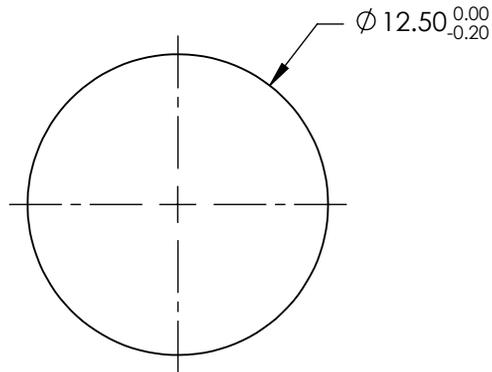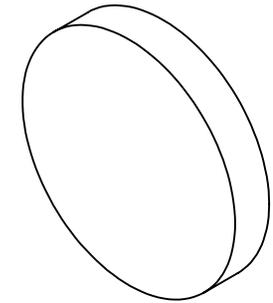

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

EO® **Edmund Optics**®

THIRD ANGLE PROJECTION		TITLE	Ø12.5mm, HIGH CONTRAST VIS-NIR POLARIZER	
ALL DIMS IN	mm	DWG NO	36652	SHEET 1 OF 1