

NOTES:

- SUBSTRATE:  
LIBA 2000+
- CENTERING TOLERANCE (AT 587.6nm): BEAM DEVIATION (HALF ANGLE): <25 ARCMIN
- COATING (APPLY ACROSS COATING APERTURE)  
S1: NONE  
S2: NONE

4. EDGE: AS MOLDED



5. ASPHERIC SURFACE DESCRIBED BY THE FOLLOWING EQUATION AND COEFFICIENTS SHOWN IN TABLE BELOW

$$Z(Y) = \frac{\left(\frac{1}{\text{RADIUS}}\right) * Y^2}{1 + \sqrt{1 - (1+k) * \left(\frac{1}{\text{RADIUS}}\right)^2 * Y^2}} + D * Y^2 + E * Y^4 + F * Y^6 + G * Y^8 + H * Y^{10} + J * Y^{12} + L * Y^{14} + M * Y^{16}$$

6. RoHS: COMPLIANT



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

COEFFICIENT TABLE 5.	
	S1
Semi-diameter	7.5
Coefficient	
(1/RADIUS)	1.598177E-01
k	-9.570846E-01
D	0.000000E+00
E	2.301806E-04
F	1.107939E-06
G	1.228793E-08
H	8.094662E-12
J	0.000000E+00
L	0.000000E+00
M	0.000000E+00

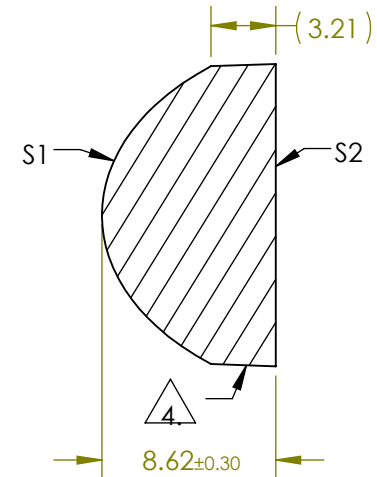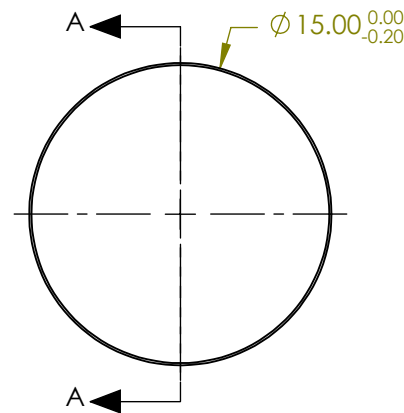

SECTION A-A

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL: 12.00	 <b>Edmund Optics®</b>		
SHAPE	CONVEX	PLANO	BFL: 6.33			
RADIUS	6.257	∞		TITLE	LENS CONDENSER 15mm X 12mm UNCTD TS	
SURFACE QUALITY	As Molded	As Molded				
CLEAR APERTURE	Ø13.28	Ø13.28				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	36166
						SHEET 1 OF 1