

## NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 8° 37' NOMINAL BLAZE WAVELENGTH: 500nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



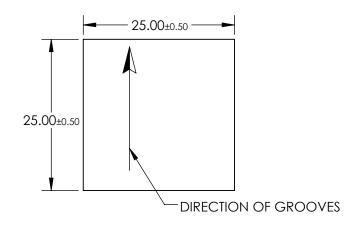



## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund	Optics®
--	--------	---------

			1 1		'	GRATING DIFF 600GR 500nm 25 x 25	
	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	CK/MING BITT GOOGK GOOTHTI 25 X 20	
SHAPE	PLANO	PLANO					CUEET
CLEAR APERTURE	22.5 x 22.5	22.5 x 22.5	ALL DIMS IN	mm	DWG NO	43743	SHEET 1 OF 1