
NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): S1: BARE ALUMINUM S2: NONE
- 3. BLAZE ANGLE: 28° 41' NOMINAL BLAZE WAVELENGTH: 1600nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH

EDGES GROUND /4.\

5. ROHS COMPLIANT



1 OF 1

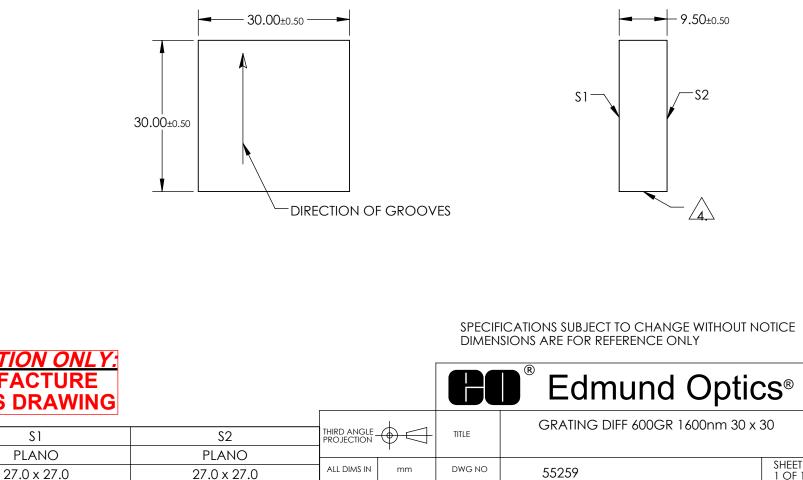

FORM F **NOT MANUFACTURE** DO PARTS TO THIS DRAWING

SHAPE

CLEAR APERTURE

S1