NOTES:

1. SUBSTRATE MATERIAL: **ALUMINUM**


PARTS TO THIS DRAWING


- 2. FINISH (EXCEPT SURFACE \$1 & \$2): BLACK ANODIZED


3. COATING (APPLY ACROSS CLEAR APERTURE)
S1: PROTECTED GOLD
R(AVG) >94% @ 0.7-0.8µm
R(AVG) >97% @ 0.8-2.0µm
R(AVG) >98% @ 2-12µm

SURFACE ROUGHNESS: <50 Å RMS

- 4. FOCAL LENGTH TOLERANCE: ±1%
- 5. ROHS COMPLIANT

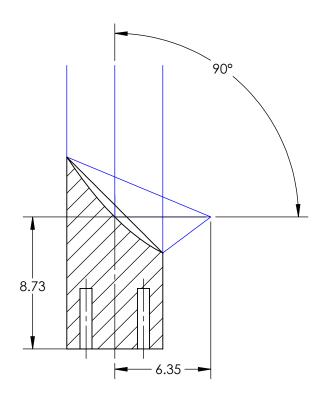





SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	\$1		
SHAPE	PARABOLIC	T	
SURFACE FIGURE AT 632.8nm (RMS)	λ/8		
CLEAR APERTURE	90%	1	
BEVEL	PROTECTIVE AS NEEDED		
-	·		

THIRD ANGLE PROJECTION	$\phi \Box$	TITLE
ALL DIMS IN	mm	DWG

®	Edmur	nd	Optio	CS®
Ø6.3	5 X 6.35mm EFL,			D 50Å

SHEET

1 OF 1

	Υ '		OTT-AXIST ARABOLIC WIIRROR	
DIMS IN	mm	DWG NO	37294	