
NOTES:

- 1. SUBSTRATE: FUSED SILICA
- 2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN 15±1 ARCMIN
- 3. COATING (APPLY ACROSS COATING APERTURE)

S1: R(ABS) ≤ 0.25% @ 633nm S2: NONE

- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 5. ROHS COMPLIANT

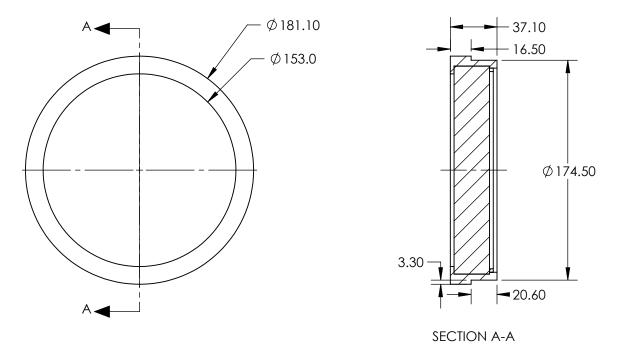

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

Shape	S1 PLANO	S2 PLANO			Edmund Optic	CS ®
SURFACE FLATNESS	λ /20	λ /20			TRANSMISSION FLAT 1/20 WAVE 6	
SURFACE QUALITY	20-10	20-10	THIRD ANGLE	TITLE		
CLEAR APERTURE	153.0	153.0				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN mm	DWG NO	37116	SHEET 1 OF 1