

## NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLY ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. WAVELENGTH RANGE: 400-700nm ABSOLUTE DIFFRACTION EFFICIENCY: 45-65% GROOVE DENSITY: 1800 grooves/mm



5. RoHS: COMPLIANT



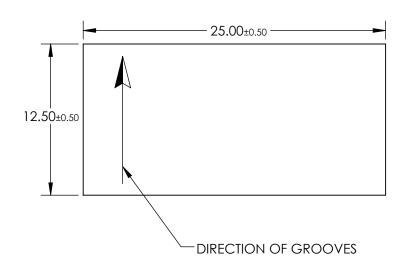

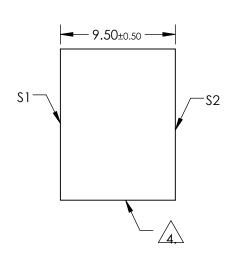

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

				1 .
	\$1	\$2	THIRD ANGLE PROJECTION	$\bigcirc$
SHAPE	PLANO	PLANO		
CLEAR APERTURE	11.25 x 22.5	N/A	ALL DIMS IN	mm

**Edmund Optics**®

THIRD ANGLE PROJECTION	<b>♦ □</b>	TITLE	GRATING HOLO 1800GR VIS 12.5 X	25
ALL DIMS IN	mm	DWG NO	43221	SHEET 1 OF 1