
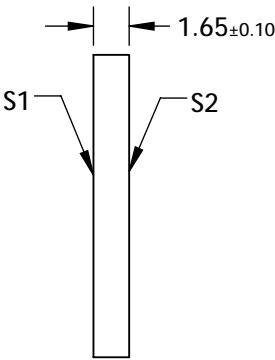
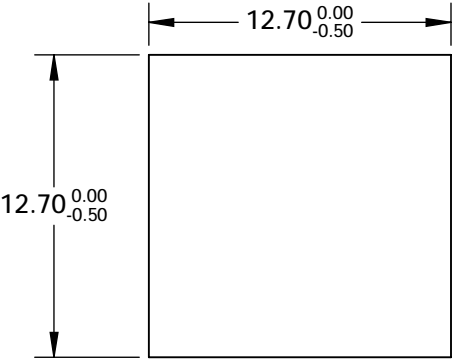


- NOTES:
- SUBSTRATE MATERIAL:
FUSED SILICA
 - SURFACE S1 TO BE PARALLEL TO SURFACE S2 TO WITHIN <3 ARCMIN
 - COATING (APPLY ACROSS COATING APERTURE)
 S1: Square Aluminum (AlMgF2) Apertures
 R: 30±5% @ 250 - 2000nm @ 45° AOI
 T: 70±5% @ 250 - 2000nm @ 45° AOI
 S2: NONE
 - POLKA DOT CENTER TO CENTER SPACING : 0.15mm
 POLKA DOT MINIMUM APERTURE: 2mm
 - ROHS : COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80-50	80-50
CLEAR APERTURE	90%	90%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE
PROJECTION

ALL DIMS IN mm

		Edmund Optics®	
TITLE		BS POLKA-DOT 30/70 12.7mm SQ	
DWG NO	47611	SHEET 1 OF 1	