
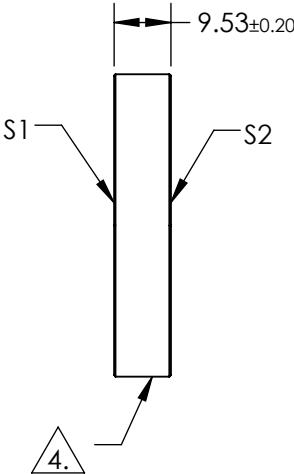


NOTES:

- 1. SUBSTRATE:
FUSED SILICA
- 2. S2 TO BE PARALLEL TO S1 TO WITHIN <3 ARCMINS
- 3. COATING (APPLY ACROSS COATING APERTURE)
S1: NONE
S2: NONE



4. FINE GROUND SURFACE

- 5. CLEAR APERTURE AND COATING APERTURE ARE CENTERED ON SURFACE
- 6. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY
ACROSS CLEAR APERTURE
- 7. ROHS COMPLIANT

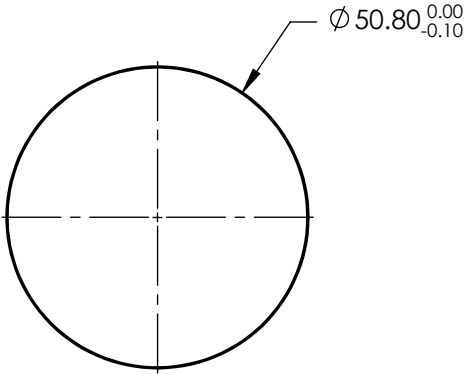

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 |  Edmund Optics® | | | |
|--------------------|----------------------|----------------------|--|--------|--|--------------|
| SHAPE | PLANO | PLANO |  | TITLE | Ø50.8mm x 9.53mm UNCTD FS LASER WINDOW SUBSTRATE | |
| SURFACE QUALITY | 10-5 | 10-5 | | DWG NO | 38060 | SHEET 1 OF 1 |
| SURFACE FLATNESS | λ /10 | λ /10 | | | | |
| MIN CLEAR APERTURE | Ø45.72 | Ø45.72 | | | | |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | ALL DIMS IN | mm | | |