
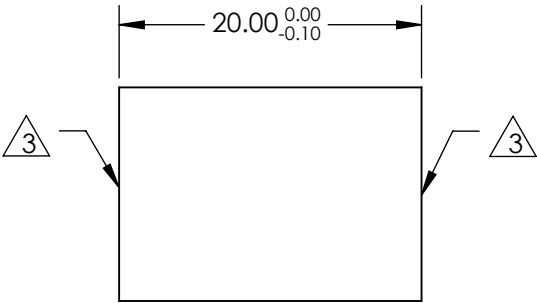


NOTES:

- 1. SUBSTRATE: FUSED SILICA
- 2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: NONE
 - S2: 266nm Laser AR Coating
 - R(ABS) < 0.25% @ 266nm @ 0° AOI
- DAMAGE THRESHOLD
- PULSED: 3J/cm² @ 20ns, 20Hz @ 266nm



3 FINE GRIND SURFACE

- 4. ROHS COMPLIANT

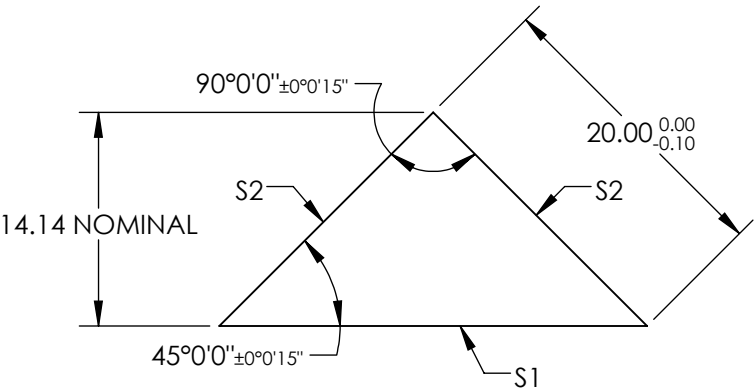

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®			
SHAPE	PLANO	PLANO		TITLE	20mm 1/20 WV 266nm AR CTD HT RA FS PRISM	
SURFACE QUALITY	20-10	20-10				
CLEAR APERTURE	25.45 x 18.00	Ø18.00				
SURFACE FLATNESS	λ/20	λ/20				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	37620
					SHEET 1 OF 1	