




NOTES:

1. SUBSTRATE: ZnSe
2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN < 3 ARCMIN
3. COATING (APPLY ACROSS COATING APERTURE)

S1 & S2: HIGH- EFFICIENCY BROADBAND (BBAR)
 R(AVG) ≤ 3.0% FROM 3 - 12μm

△ FINE GRIND SURFACE

5. RoHS: COMPLIANT

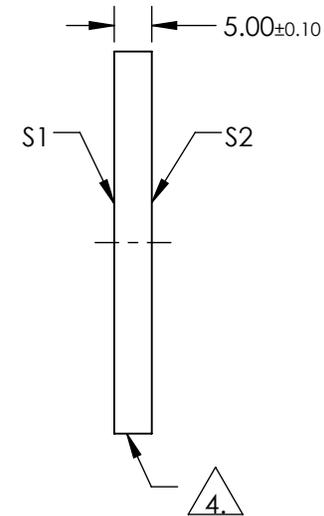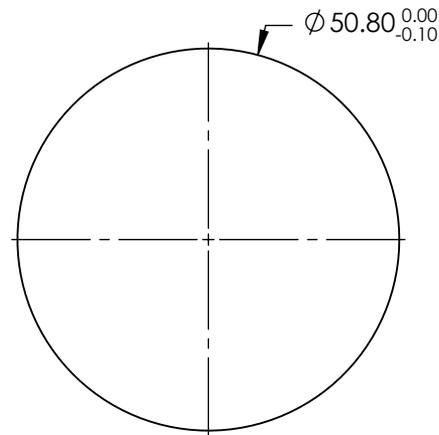

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	Edmund Optics®													
SHAPE	PLANO	PLANO	<table border="1"> <tr> <td colspan="2">THIRD ANGLE PROJECTION </td> <td>TITLE</td> <td colspan="2">50.8mm DIA x 5mm THICK 3 - 12μm COATED ZnSe WINDOW</td> </tr> <tr> <td>ALL DIMS IN</td> <td>mm</td> <td>DWG NO</td> <td>39416</td> <td>SHEET 1 OF 1</td> </tr> </table>				THIRD ANGLE PROJECTION		TITLE	50.8mm DIA x 5mm THICK 3 - 12μm COATED ZnSe WINDOW		ALL DIMS IN	mm	DWG NO	39416	SHEET 1 OF 1
THIRD ANGLE PROJECTION		TITLE					50.8mm DIA x 5mm THICK 3 - 12μm COATED ZnSe WINDOW									
ALL DIMS IN	mm	DWG NO					39416	SHEET 1 OF 1								
SURFACE QUALITY	40-20	40-20														
SURFACE FLATNESS @ 10.6μm	λ/20	λ/20														
CLEAR APERTURE	Ø45.72	Ø45.72														
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED														