

## NOTES:

1. COATING (APPLY ACROSS COATING APERTURE) Enhanced Aluminum (200–11000nm) R(AVG) >85% @ 200 - 700nm R(AVG) >76% @ 700 - 1750nm R(AVG) >96% @ 1750 - 11000nm

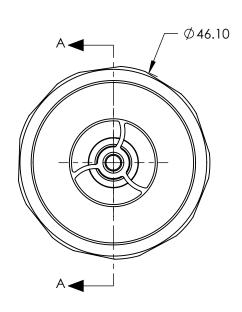

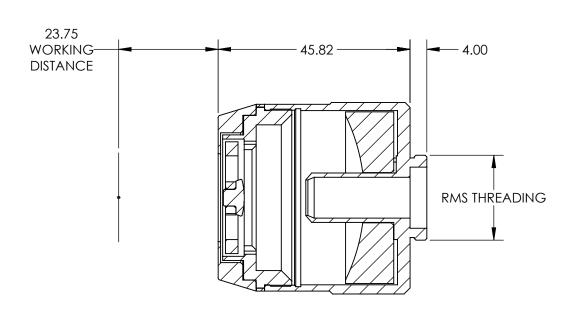

SECTION A-A

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund Optics®
1	Finite Conjugate IIV Coated 15X/0 28NA

THIRD ANGLE PROJECTION		TITLE	Finite Conjugate, UV Coated, 15X/0.2 ReflX Objective	8NA
ALL DIMS IN	mm	DWG NO	58421	SHEET 1 OF 1