NOTES:


1. MATERIAL: ZERODUR®


2. COATING TYPE: BARE ALUMINUM

3. BLAZE WAVELENGTH: 180nm

4. GROVE DENSITY (GROVES/mm): 2400

5. RoHS: COMPLIANT

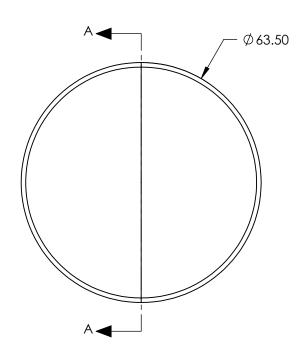

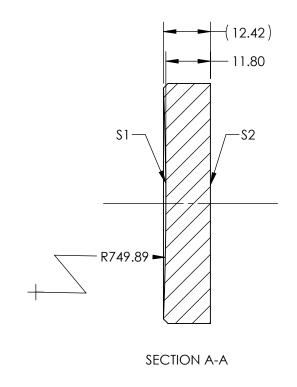

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund Optics®
2	100 Grooves/mm 0/6/15mm 180nm

	S1	\$2	THIRD ANGLE PROJECTION		TITLE	2400 Grooves/mm, Ø64.5mm, 180nm ROWLAND CIRCLE CONCAVE DIFFRACTION GRATING	
SHAPE	CONCAVE	PLANO					
DIFFRACTION AREA (mm)	Ø58.00	N/A					
BEVEL MAX FACE	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	11538	SHEET 1 OF 1