


NOTES:

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**




1. SUBSTRATE: UV GRADE FUSED SILICA
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <30 arcsec
3. COATING (APPLY ACROSS COATING APERTURE)

DURABILITY: MIL-C-48497A, SECT. 3.4.1


PERFORMANCE SPECIFICATIONS: @ 0° AOI
 T(avg): ≥91% FROM 300 - 392nm
 T(avg): ≤ 0.01% FROM 410 - 610nm
 CUT-OFF SLOPE: <1%
 CUT-OFF WAVELENGTH: 400nm ± 1%

4. FINE GRIND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
6. TRANSMITTED WAVEFRONT DISTORTION RMS@ 632.8nm ≤ ¼ λ
7. ROHS COMPLIANT

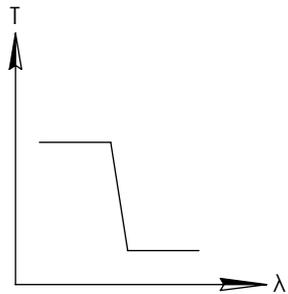

SHORTPASS FILTER

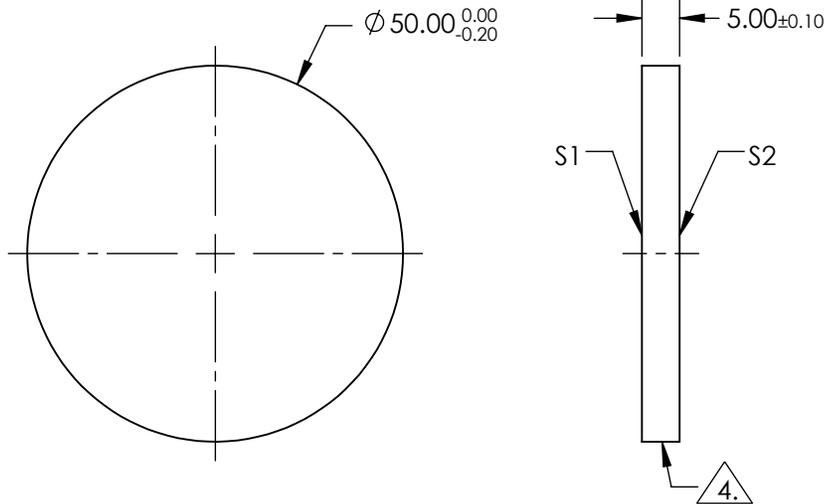


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY



	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	>80%	>80%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN


mm

TITLE	400nm 50mm Diameter, OD 4 Shortpass Filter
DWG NO	84715
SHEET	1 OF 1

NOTES:



1. SUBSTRATE: UV GRADE FUSED SILICA
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <30 arcsec
3. COATING (APPLY ACROSS COATING APERTURE)
 DURABILITY: MIL-C-48497A, SECT. 3.4.1
 PERFORMANCE SPECIFICATIONS: @ 0° AOI
 T(avg): ≥91% FROM 300 - 441nm
 T(avg): ≤ 0.01% FROM 460 - 660nm
 CUT-OFF SLOPE: <1%
 CUT-OFF WAVELENGTH: 450nm ± 1%

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING



4. FINE GRIND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
6. TRANSMITTED WAVEFRONT DISTORTION RMS@ 632.8nm ≤ ¼ λ
7. ROHS COMPLIANT

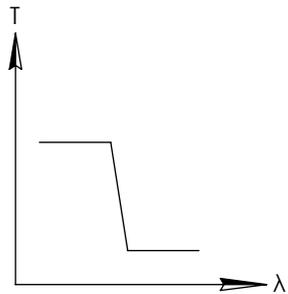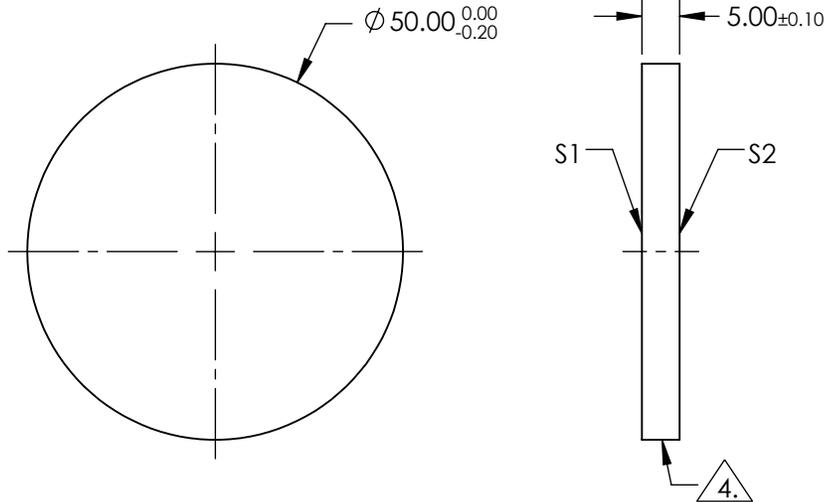


SHORTPASS FILTER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	>80%	>80%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

TITLE

450nm 50mm Diameter, OD 4 Shortpass Filter

DWG NO


84717

SHEET
1 OF 1

NOTES:



1. SUBSTRATE: UV GRADE FUSED SILICA
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <30 arcsec
3. COATING (APPLY ACROSS COATING APERTURE)
 DURABILITY: MIL-C-48497A, SECT. 3.4.1
 PERFORMANCE SPECIFICATIONS: @ 0° AOI
 T(avg): ≥91% FROM 300 - 490nm
 T(avg): ≤ 0.01% FROM 512 - 715nm
 CUT-OFF SLOPE: <1%
 CUT-OFF WAVELENGTH: 500nm ± 1%

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING



 FINE GRIND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
6. TRANSMITTED WAVEFRONT DISTORTION RMS@ 632.8nm ≤ ¼ λ
7. ROHS COMPLIANT

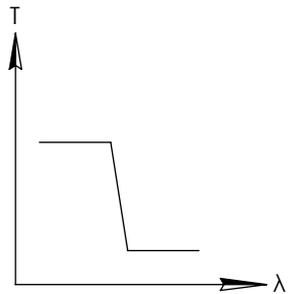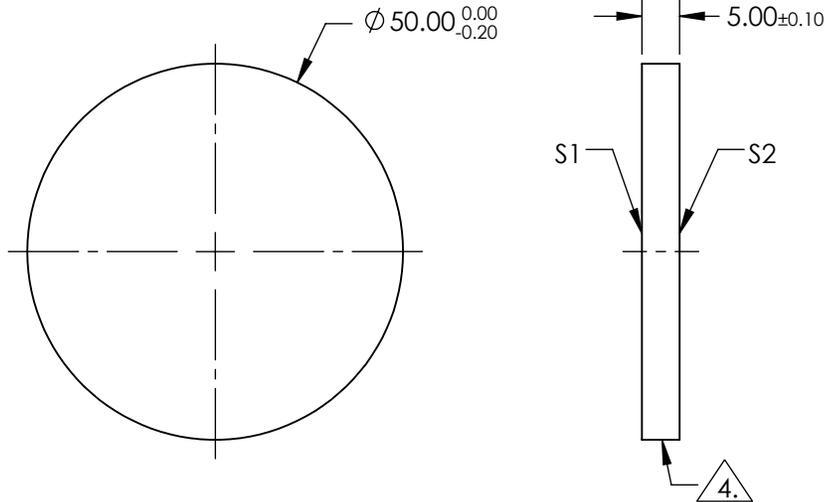


SHORTPASS FILTER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

 **Edmund Optics®**

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	>80%	>80%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

TITLE

500nm 50mm Diameter, OD 4 Shortpass Filter

DWG NO


84719

SHEET
1 OF 1

NOTES:



1. SUBSTRATE: UV GRADE FUSED SILICA
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <30 arcsec
3. COATING (APPLY ACROSS COATING APERTURE)
 DURABILITY: MIL-C-48497A, SECT. 3.4.1
 PERFORMANCE SPECIFICATIONS: @ 0° AOI
 T(avg): ≥91% FROM 350 - 539nm
 T(avg): ≤ 0.01% FROM 562 - 825nm
 CUT-OFF SLOPE: <1%
 CUT-OFF WAVELENGTH: 550nm ± 1%

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING



4. FINE GRIND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
6. TRANSMITTED WAVEFRONT DISTORTION RMS@ 632.8nm ≤ ¼ λ
7. ROHS COMPLIANT

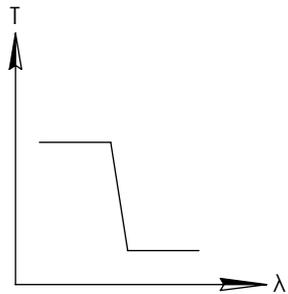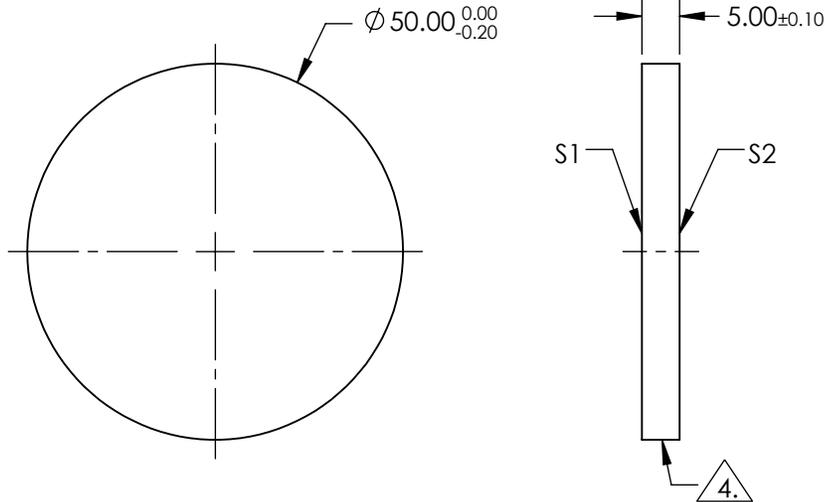


SHORTPASS FILTER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	>80%	>80%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

TITLE

550nm 50mm Diameter, OD 4 Shortpass Filter

DWG NO


84721

SHEET
1 OF 1

NOTES:


1. SUBSTRATE: UV GRADE FUSED SILICA
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <30 arcsec
3. COATING (APPLY ACROSS COATING APERTURE)
 DURABILITY: MIL-C-48497A, SECT. 3.4.1
 PERFORMANCE SPECIFICATIONS: @ 0° AOI
 T(avg): ≥91% FROM 350 - 587nm
 T(avg): ≤ 0.01% FROM 614 - 900nm
 CUT-OFF SLOPE: <1%
 CUT-OFF WAVELENGTH: 600nm ± 1%

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING




4. FINE GRIND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
6. TRANSMITTED WAVEFRONT DISTORTION RMS@ 632.8nm ≤ ¼ λ
7. ROHS COMPLIANT

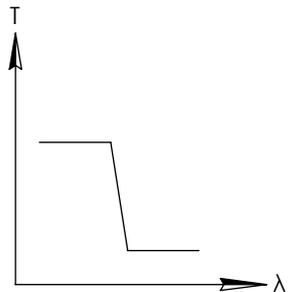

SHORTPASS FILTER

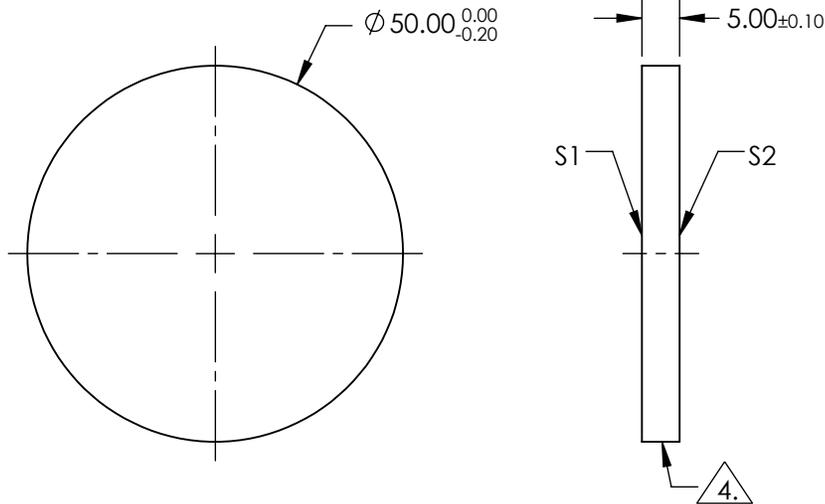


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	>80%	>80%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

TITLE

600nm 50mm Diameter, OD 4 Shortpass Filter

DWG NO


84723

SHEET
1 OF 1

NOTES:


1. SUBSTRATE: UV GRADE FUSED SILICA
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <30 arcsec
3. COATING (APPLY ACROSS COATING APERTURE)
 DURABILITY: MIL-C-48497A, SECT. 3.4.1
 PERFORMANCE SPECIFICATIONS: @ 0° AOI
 T(avg): ≥91% FROM 350 - 636nm
 T(avg): ≤ 0.01% FROM 665 - 960nm
 CUT-OFF SLOPE: <1%
 CUT-OFF WAVELENGTH: 650nm ± 1%

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING




4. FINE GRIND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
6. TRANSMITTED WAVEFRONT DISTORTION RMS@ 632.8nm ≤ ¼ λ
7. ROHS COMPLIANT

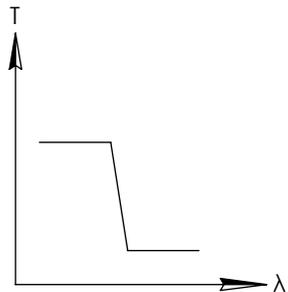

SHORTPASS FILTER

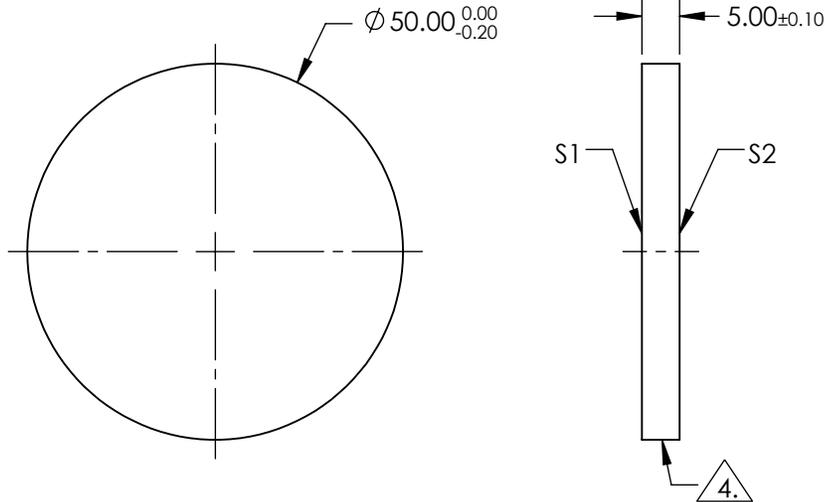


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	>80%	>80%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

TITLE

650nm 50mm Diameter, OD 4 Shortpass Filter

DWG NO


84725

SHEET
1 OF 1

NOTES:


1. SUBSTRATE: UV GRADE FUSED SILICA
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <30 arcsec
3. COATING (APPLY ACROSS COATING APERTURE)
 DURABILITY: MIL-C-48497A, SECT. 3.4.1
 PERFORMANCE SPECIFICATIONS: @ 0° AOI
 T(avg): ≥91% FROM 400 - 685nm
 T(avg): ≤ 0.01% FROM 715 - 1050nm
 CUT-OFF SLOPE: <1%
 CUT-OFF WAVELENGTH: 700nm ± 1%

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING




4. FINE GRIND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
6. TRANSMITTED WAVEFRONT DISTORTION RMS@ 632.8nm ≤ ¼ λ
7. ROHS COMPLIANT

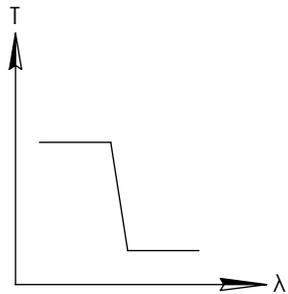

SHORTPASS FILTER

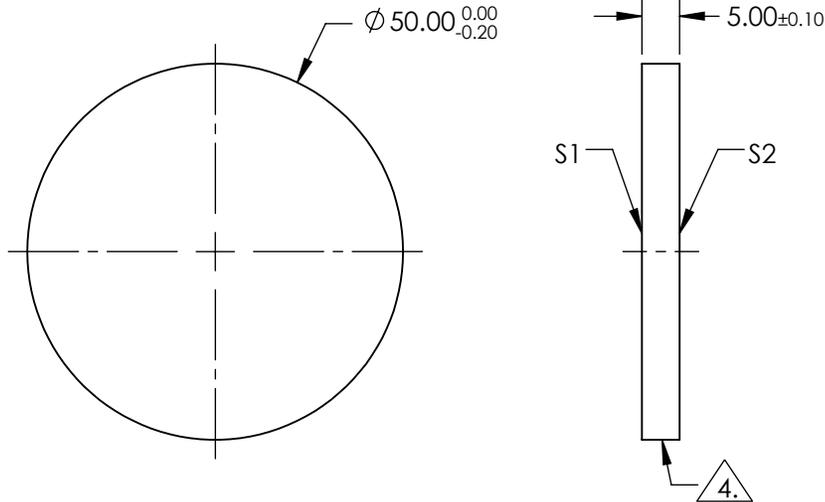


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	>80%	>80%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

TITLE

700nm 50mm Diameter, OD 4 Shortpass Filter

DWG NO

84727

SHEET
1 OF 1