

## NOTES:

- SUBSTRATE:
   FUSED SILICA MOUNTED IN BLACK ANODIZED ALUMINUM RING
- 2. TRNSMITTED WAVEFRONT ERROR: λ/4
- 3. RoHS: COMPLIANT



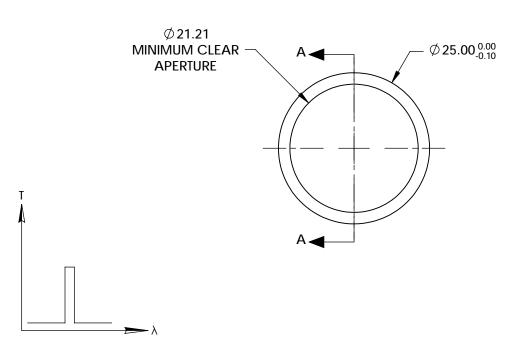

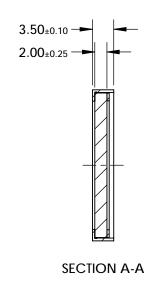

**BANDPASS FILTER** 

	VALUE
CENTER WAVELENGTH (CWL) (nm)	562 ± 2
MINIMUM BANDWIDTH (nm)	40
FULL WIDTH HALF MAX (FWHM) (nm)	46
MINIMUM TRANSMISSION (%)	>93
OD6 BLOCKING RANGE (nm)	250 - 528 & 595 - 750
SURFACE QUALITY	60-40
COATING TYPE	HARD COATED
DURABILITY MIL-C-48497A SECT. 3.4.1	
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY





THIRD ANGLE PROJECTION		$\phi \lhd$	TITLE	OD6, Ø25mm, 562nm x 46nm, BP FLUORESCENCE FILTER	
	ALL DIMS IN	mm	DWG NO	67033	SHEET 1 OF 1

## NOTES:

- 1. SUBSTRATE: FUSED SILICA MOUNTED IN BLACK ANODIZED ALUMINUM RING
- 2. TRNSMITTED WAVEFRONT ERROR: λ/4
- 3. RoHS: COMPLIANT



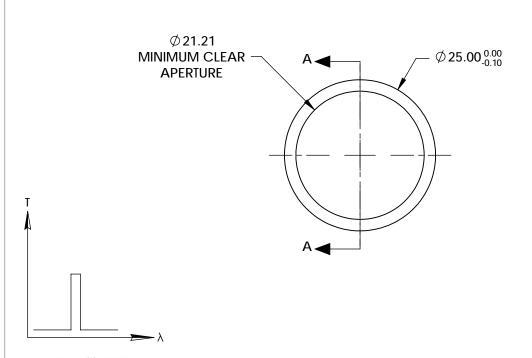

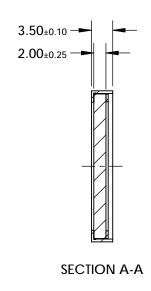

Q	ıΑ	۱V	D	D.	Δ	ς	ς	FΙ	I٦	ſΕ	D
_	m,	v	$\boldsymbol{-}$	- 4	_		J		_		ı\

	VALUE	
CENTER WAVELENGTH (CWL) (nm)	624 ± 2	
MINIMUM BANDWIDTH (nm)	40	
FULL WIDTH HALF MAX (FWHM) (nm)	46	
MINIMUM TRANSMISSION (%)	>93	
OD6 BLOCKING RANGE (nm)	445 - 595 & 663 - 818	
SURFACE QUALITY	60-40	
COATING TYPE	HARD COATED	
DURABILITY	MIL-C-48497A SECT. 3.4.1	
ENVIRONMENTAL MIL-STD-801F, SECT. 507.4		

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY



THIRD ANGLE PROJECTION		TITLE	OD6, Ø25mm, 624nm x 46nm, BP FLUORESCENCE FILTER		
	ALL DIMS IN	mm	DWG NO	67035	SHEET 1 OF 1

## NOTES:

SUBSTRATE
 UV GRADE FUSED SILICA

2. COATING (APPLY ACROSS CLEAR APERTURE)

HARD COATED

PERFORMANCE SPECS:

T(AVG) = 90% FROM 600 - 800nm @ 45 ° AOI

R(AVG) = 98% FROM 520 - 585nm @ 45 ° AOI


T(ABS) = 50% @ 593nm @ 45 ° AOI




4. SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. TRANSMITTED WAVEFRONT DISTORTION RMS @ 632.8nm ≤1λ

6. ROHS COMPLIANT

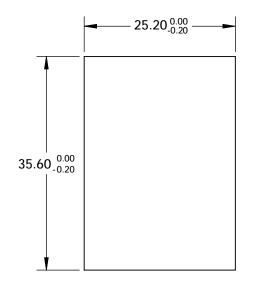

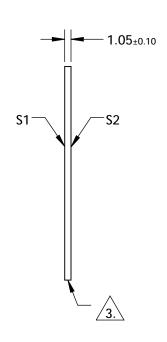

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Ontion

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	22.00 x 32.00	22.00 x 32.00
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

			<b>U</b>	<b>B</b> Earnana Optic	<b>,</b> 5°
	THIRD ANGLE PROJECTION		TITLE	593nm, 25.2 X 35.6mm, DICHROIC FIL	TER
D	ALL DIMS IN	mm	DWG NO	67083	SHEET 1 OF 1