



NOTES:

- 1. SUBSTRATE: FLOAT GLASS
- 2. ROHS: COMPLIANT
- 3. COATING (APPLY ACROSS CLEAR APERTURE):

S1:
ABRASION: SEVERE, PER MIL-C-675C Paragraph 3.8.4.1
ADHESION: MIL-PRF-13830B, App B PARA. 4.4.6



R(AVG) >70% @ 400 - 700nm
R(AVG) >90% @ 2000 - 10000nm

S2: NONE

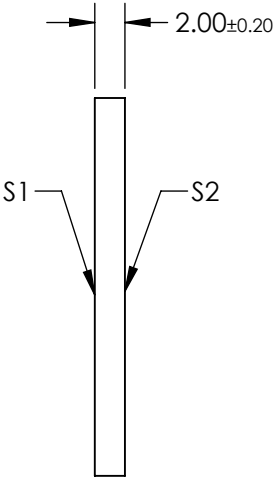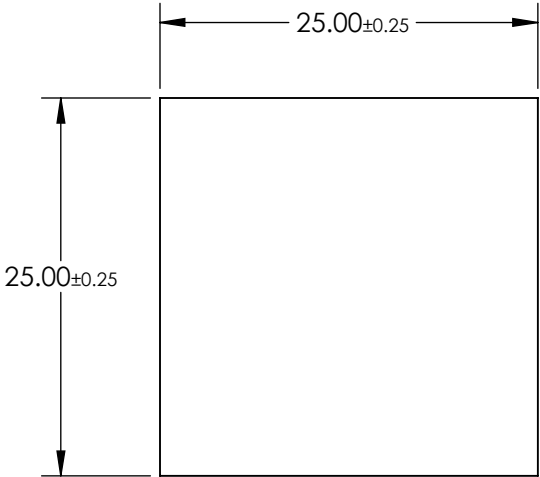

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®			
SHAPE	PLANO	PLANO				
SURFACE QUALITY	80 - 50	COMMERCIAL POLISH				
CLEAR APERTURE	22.50 x 22.50	N/A	ALL DIMS IN	mm	TITLE	MIRROR 4-6 WAVE RH 25 x 25mm
SURFACE FLATNESS	4 - 6λ	N/A			DWG NO	15490
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				SHEET 1 OF 1