

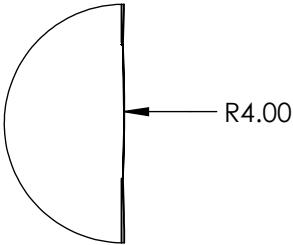


NOTES:

- 1. SUBSTRATE:
Fused Silica
- 2. COATING (APPLY ACROSS COATING APERTURE):
S1 & S2: R(ABS) ≤0.25% @ 880nm
R(AVG) ≤1.25% @ 400 - 870nm
R(AVG) ≤1.25% @ 890 - 1000nm
- 3. EFFECTIVE FOCAL LENGTH: 8.7mm
- 4. DIVERGENCE ANGLE: ±1 °
- 5. WAVELENGTH RANGE (nm): 200 - 2200
- 6. ROHS: COMPLIANT

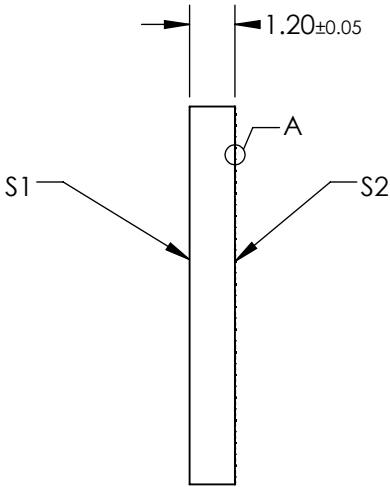

DETAIL A

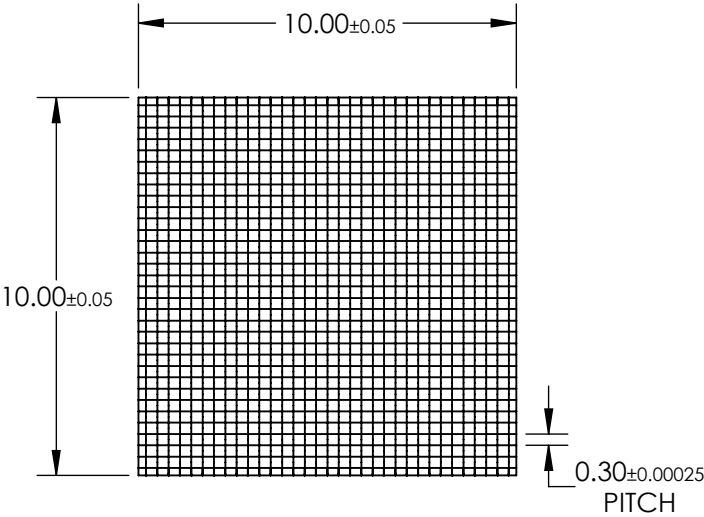

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

Edmund Optics®

THIRD ANGLE PROJECTION		TITLE	Microlens Array 10 x 10mm, 300µm Pitch, 1° Divergence, VIS-NIR Coated	
ALL DIMS IN	mm	DWG NO	15811	SHEET 1 OF 1