

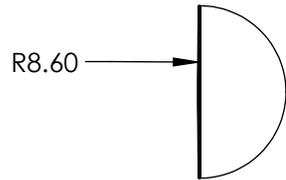


NOTES:

1. SUBSTRATE: FUSED SILICA
2. COATING (APPLY ACROSS COATING APERTURE):  
 S1 & S2: R(ABS)  $\leq 0.25\%$  @ 880nm  
 R(AVG)  $\leq 1.25\%$  @ 400 - 870nm  
 R(AVG)  $\leq 1.25\%$  @ 890 - 1000nm
3. EFFECTIVE FOCAL LENGTH: 18.80mm
4. DIVERGENCE ANGLE:  $\pm 0.5^\circ$
5. WAVELENGTH RANGE (nm): 400 - 1000
6. ROHS: COMPLIANT

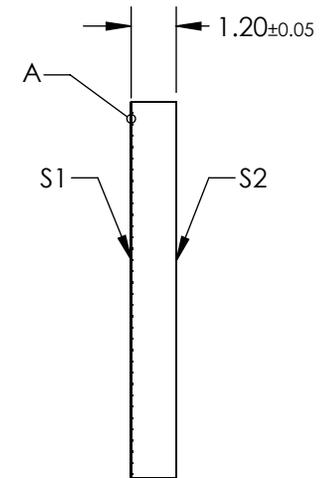

DETAIL A

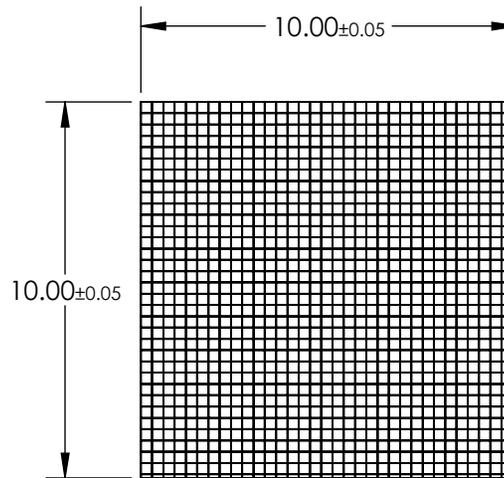

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
 DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:  
 DO NOT MANUFACTURE  
 PARTS TO THIS DRAWING**

**EO<sup>®</sup> Edmund Optics<sup>®</sup>**

THIRD ANGLE PROJECTION 		TITLE	MICROLENS ARRAY 10 x 10mm, 300µm PITCH, 0.5° DIVERGENCE, VIS-NIR COATED	
ALL DIMS IN	mm	DWG NO	15812	SHEET 1 OF 1