
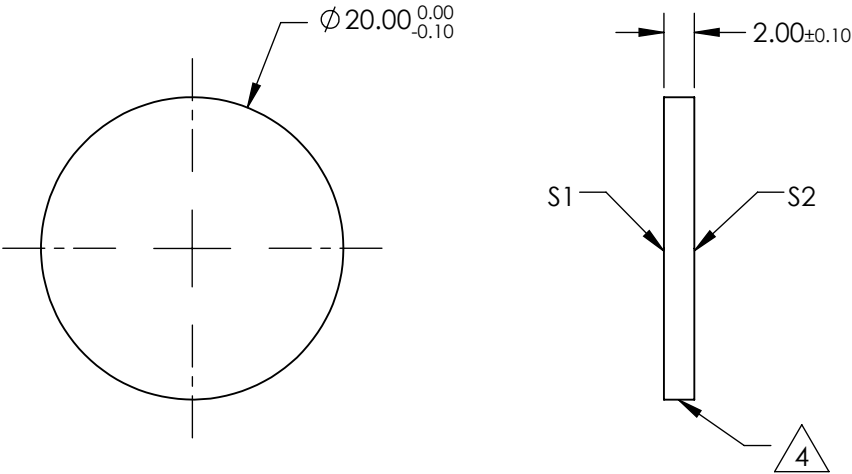


NOTES:



- 1. SUBSTRATE:
VACUUM UV GRADE CaF2
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1 arcmin
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: R(AVG) < 1% FROM 1650-3000nm @ 0° AOI
R(ABS) < 2% FROM 1650-3000nm @ 0° AOI

4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

		S1	S2	 Edmund Optics®		
SHAPE		PLANO	PLANO		TITLE	Ø20mm, BBAR(1650 - 3000nm), CALCIUM FLUORIDE WINDOW
SURFACE QUALITY		40-20	40-20			
CLEAR APERTURE		Ø18.00	Ø18.00	ALL DIMS IN	DWG NO	15966
BEVEL		PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	mm		SHEET 1 OF 1