## NOTES:

SUBSTRATE

Sapphire (Al2O3) Axis Orientation: Random


COATING (APPLY ACROSS CLEAR APERTURE)
 \$1 & \$2: NONE

3. SURFACE \$2 TO BE PARALLEL TO SURFACE \$1 TO WITHIN ≤3.5 ARCMIN



FINE GRIND SURFACE

Rohs Compliant

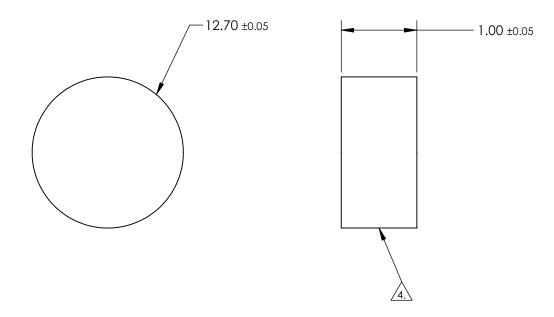

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	S1 PLANO	S2 PLANO			R	<b>Edmund Optics</b> ®
SURFACE QUALITY	80 - 50	80 - 50				12.7mm Dia., 1mm Thick, Uncoated, Sapphire
SURFACE FLATNESS	2λ (typical)	2λ (typical)	THIRD ANGLE PROJECTION		TITLE	Window
CLEAR APERTURE	Ø11.43	Ø11.43	<u>'</u>			CHEFT
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN m	nm	DWG NO	17223 SHEET 1 OF 1