
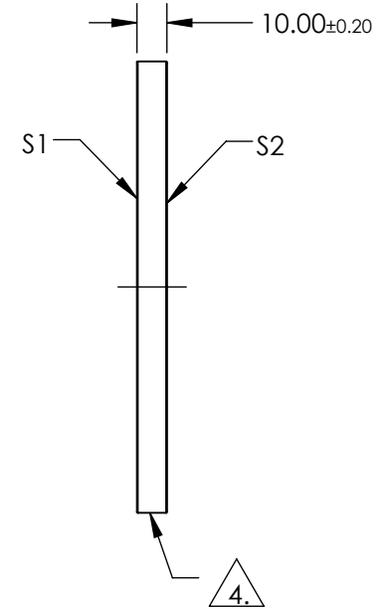
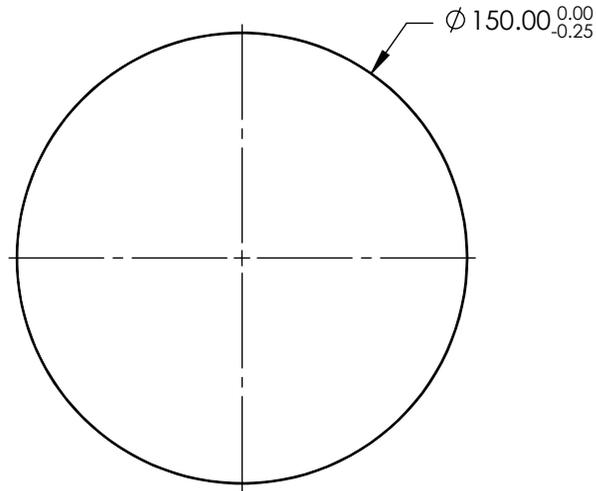


NOTES:

1. SUBSTRATE:  
N-BK7
2. S2 TO BE PARALLEL TO S1 TO WITHIN <1 ARCMIN
3. COATING (APPLY ACROSS COATING APERTURE)  
S1 & S2: VIS 0° (425-675nm)  
R(AVG) ≤0.4% @ 425 - 675nm

△ 4. FINE GRIND SURFACE

5. ROHS COMPLIANT




**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

|                  | S1                   | S2                   |
|------------------|----------------------|----------------------|
| SHAPE            | PLANO                | PLANO                |
| SURFACE QUALITY  | 60-40                | 60-40                |
| WAVELENGTH RANGE | 425 - 675 nm         | 425 - 675 nm         |
| BEVEL            | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED |

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

|        |  |              |
|--------|--|--------------|
| TITLE  | 150mm DIA., 10mm THICK, VIS 0° COATED λ/4 N-BK7 WINDOW |              |
| DWG NO | 17300  | SHEET 1 OF 1 |