

NOTES:

- 1. SUBSTRATE: POLYMER FILM XP42 ON 0.5 mm PMMA
- 2. OPERATING TEMPERATURE (°C): -10 to +60
- 3. OPERATING HUMIDITY (%): ≤80 (No Condensation)
- 4. WAVELENGTH RANGE: 400-700nm
- 5. POLARIZATION: >99.98
- 6. TRANSMISSION (%):

SINGLE 42 ±2 PARALLEL: 36.4 CROSSED: <0.004

7. ROHS COMPLIANT

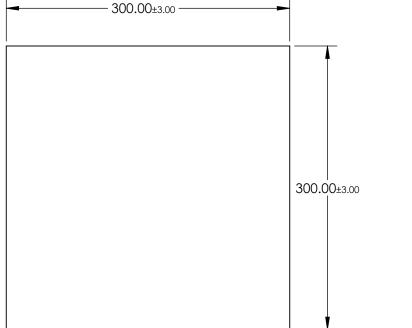



-- 0.72±0.15

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

THIRD ANGLE PROJECTION		TITLE	300 x 300mm Linear Polarizer (XP42-70)	
ALL DIMS IN	mm	DWG NO	19948	SHEET 1 OF 1