

NOTES:

1. SUBSTRATE: UV Grade MgF2
2. SURFACE S2 TO BE PARALLEL WITH SURFACAE S1 TO WITHIN 1 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)

OPTICAL DENSITY =  $2.0 \pm 0.15$  FROM 120 - 200nm


S1: COATED  
S2: UNCOATED

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

4. FINE GRIND SURFACE (ADD INK NOTE AS NEEDED)

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS  
APPLY ACROSS CLEAR APERTURE


6. TRANSMITTED WAVEFRONT DISTORTION P-V @ 632.8nm:  $\lambda/4$

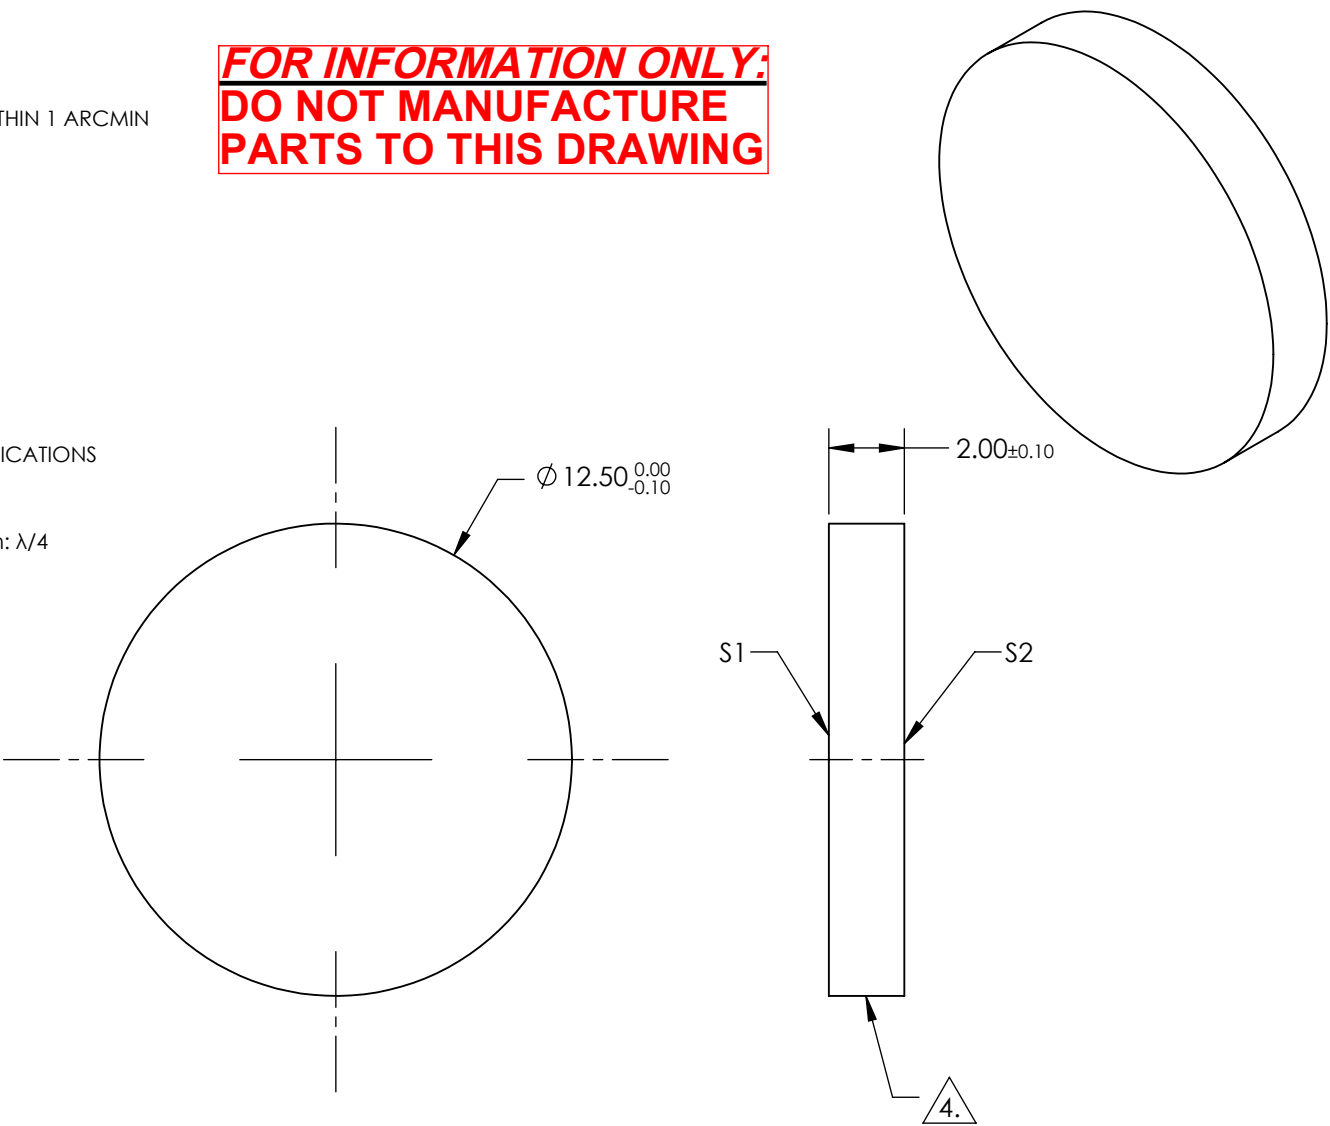

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø 10	Ø 10
COATING APERTURE	Ø 10	Ø 10
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE  
PROJECTION



ALL DIMS IN

mm



**Edmund Optics®**

TITLE

2.0 OD 12.5mm Diameter VUV ND Filter

DWG NO

20137

SHEET  
1 OF 1