

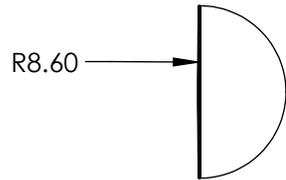


NOTES:

1. SUBSTRATE: FUSED SILICA
2. COATING (APPLY ACROSS COATING APERTURE):  
 S1 & S2:  $R(\text{ABS}) \leq 1.5\%$  FROM 750-800nm  
 $R(\text{ABS}) \leq 1.0\%$  FROM 800-1550nm  
 $R(\text{AVG}) \leq 0.7\%$  FROM 750-1550nm
3. EFFECTIVE FOCAL LENGTH: 18.80mm
4. DIVERGENCE ANGLE:  $\pm 0.5^\circ$
5. WAVELENGTH RANGE (nm): 750 - 1550
6. ROHS: COMPLIANT

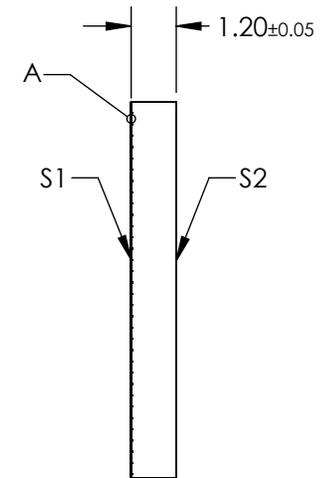


DETAIL A

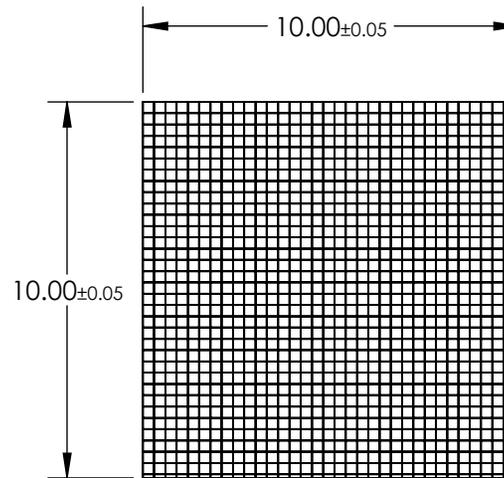

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
 DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

**FOR INFORMATION ONLY:  
 DO NOT MANUFACTURE  
 PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION 		TITLE	Microlens Array 10 x 10mm, 300µm Pitch, 0.5° Divergence, NIR II Coated	
ALL DIMS IN	mm	DWG NO	21147	SHEET 1 OF 1