




NOTES:

1. SUBSTRATE:
Fused Silica
2. COATING (APPLY ACROSS COATING APERTURE):
S1 & S2: R(ABS) $\leq 1.0\%$ @ 350 - 450nm
R(AVG) $\leq 1.5\%$ @ 250 - 700nm
3. EFFECTIVE FOCAL LENGTH: 46.7mm
4. DIVERGENCE ANGLE: $\pm 0.25^\circ$
5. WAVELENGTH RANGE (nm): 250 - 700
6. ROHS: COMPLIANT

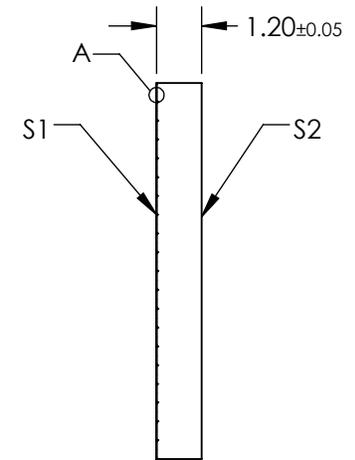

DETAIL A

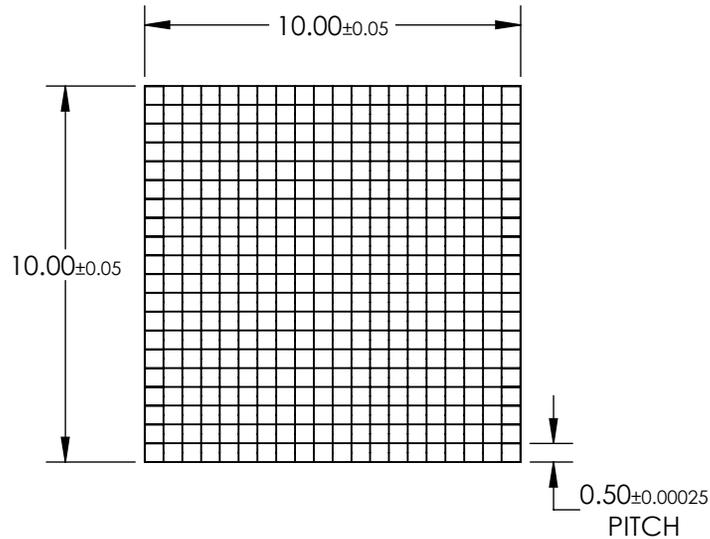

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION		TITLE	Microlens Array 10 x 10mm, 500µm Pitch, 0.25° Divergence, UV-VIS Coated	
ALL DIMS IN	mm	DWG NO	21154	SHEET 1 OF 1