NOTES:

1. SUBSTRATE:


Zinc Selenide (ZnSe), CVD Grade

2. CENTERING TOLERANCE: <3 ARCMIN

- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: NONE
- 4. FINE GRIND SURFACE

5. FOCAL LENGTH TOLERANCE: ±2%

6. ROHS COMPLIANT

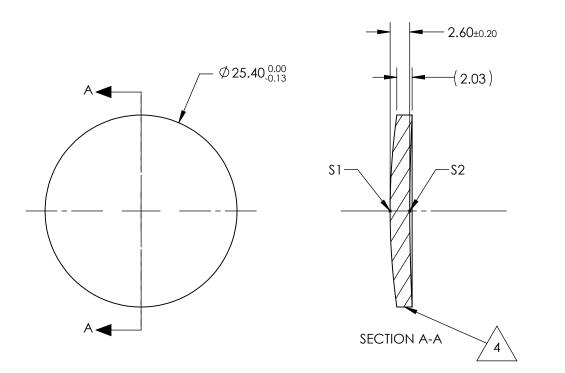

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

PARTS TO THIS DRAWING			EFL @ 10.6µm	101	SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY		OTICE
	S1	S2					
SHAPE	CONVEX	CONCAVE	BFL @	98.98		Edmund Ontion	C R
RADIUS	90.78	250	10.6µm			Edmund Optics [®]	
IRREGULARITY AT 10.6µm	λ/20	λ/20			<u>,</u>	25.4mm Dia. x 101mm FL, Uncoated,	
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION	$\bigcirc \bigcirc$	TITLE	Optics Zinc Selenide (ZnSe) Meniscus I	Lens
CLEAR APERTURE	ø22.86	ø22.86		I			
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	24915	Sheet 1 of 1