NOTES:

1. SUBSTRATE: SODIUM SILICATE GLASS DOPED WITH SILVER NANOPARTICLES


2. COATING: Single-Side AR


3. TYPICAL ENERGY DENSITY LIMIT: 10 W/cm2

4. EXTINCTION RATIO: >10,000:1

5. WAVELENGTH RANGE: 1500-1600

6. ROHS COMPLIANT



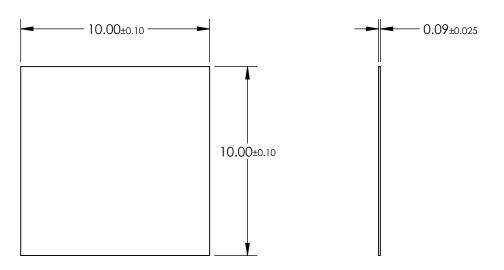

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	S1 PLANO	\$2 PLANO			Edmund Optics®
SURFACE QUALITY	40 - 20	40 - 20			Ultra-Thin Polarizer, 1550nm, 10 x 10mm, Single
TRANSMISSION (%)	>92	>92	THIRD ANGLE PROJECTION	TITLE	AR
ACCEPTANCE ANGLE	±20°	±20°			
BEVEL MAX FACE	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN mm	DWG NO	26647 SHEET 4 OF 6