NOTES:

- 1. SUBSTRATE: N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)


\$1&\$2: Ravg <0.5% @ 350 - 700nm



ARROW POINTS TOWARD TILTED SURFACE



- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT

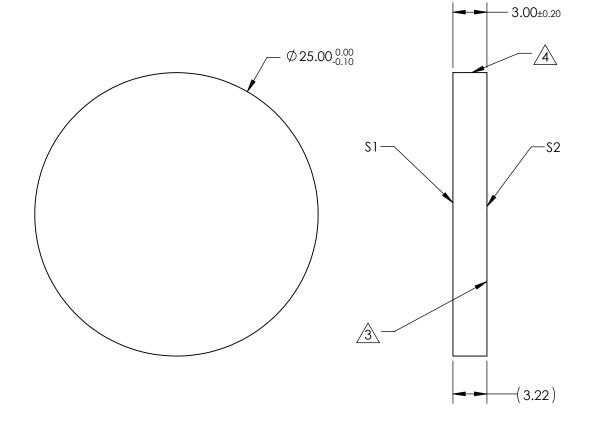

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SHAPE	PLANO	PLANO	
RADIUS	INFINITY	INFINITY	
MINI CLEAR APERTURE	Ø 22.50	Ø 22.50	
SURFACE QUALITY	20-10	20-10	
SURFACE ACCURACY	λ/10	λ/10	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	

				Edmund Optic	S®
	THIRD ANGLE - PROJECTION		TITLE	25mm, VIS-EXT Coated, N-BK7 Wedged Window	
_	ALL DIMS IN	mm	DWG NO	25625	SHEET 11 OF 15