## NOTES:

1. SUBSTRATE: N-BK7


2. COATING (APPLY ACROSS CLEAR APERTURE)

\$1&\$2: Rabs ≤0.25% @ 880nm Ravg ≤1.25% @ 400 - 870nm Ravg ≤1.25% @ 890 - 1000nm

3. ARROW POINTS TOWARD TILTED SURFACE

## 

- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT

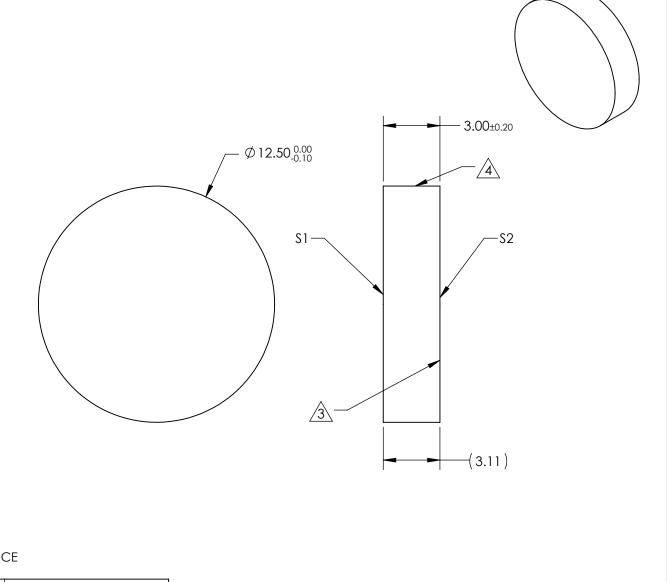

## *FOR INFORMATION ONLY:* DO NOT MANUFACTURE PARTS TO THIS DRAWING

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2				®	
SHAPE	PLANO	PLANO				Edmund Optic	<b>C</b> ®
RADIUS	INFINITY	INFINITY					,J*
MINI CLEAR APERTURE	Ø11.25	Ø11.25				12.5mm, VIS-NIR Coated, N-BK7 Wedged	
SURFACE QUALITY	20-10	20-10			TITLE	Window	gcu
SURFACE ACCURACY	λ/10	λ/10				·····	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	25724	SHEET 13 OF 15