NOTES:

1. SUBSTRATE: N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

\$1&\$2: Rabs ≤0.25% @ 880nm Ravg ≤1.25% @ 400 - 870nm Ravg ≤1.25% @ 890 - 1000nm






ARROW POINTS TOWARD TILTED SURFACE



- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT

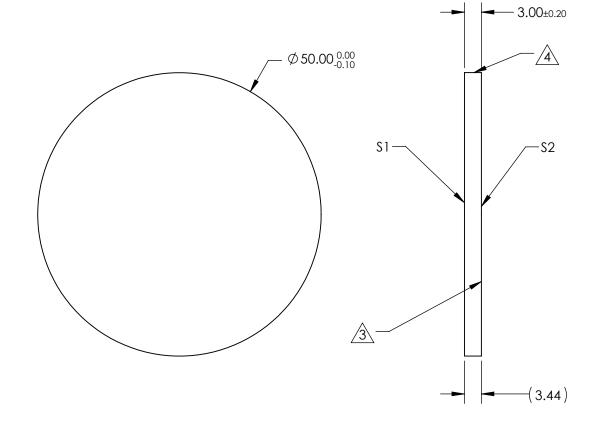

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SHAPE	PLANO	PLANO	
RADIUS	INFINITY	INFINITY	
MINI CLEAR APERTURE	Ø 45.00	Ø 45.00	
SURFACE QUALITY	20-10	20-10	
SURFACE ACCURACY	λ/10	λ/10	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	

		81	Edmund Optic	S®
THIRD ANGLE PROJECTION	$\phi \Leftrightarrow$	TITLE	50mm, VIS-NIR Coated, N-BK7 Wedged Window	
ALL DIMS IN	mm	DWG NO	25726	SHEET 15 OF 15