


NOTES:

- 1. SUBSTRATE:  
FUSED SILICA
- 2. S2 TO BE PARALLEL WITH S1 TO <1 arcsec
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

S1&S2: Rabs ≤0.25% @ 880nm  
Ravg ≤1.25% @ 400 - 870nm  
Ravg ≤1.25% @ 890 - 1000nm

4. FINE GRIND SURFACE

- 5. ROHS COMPLIANT

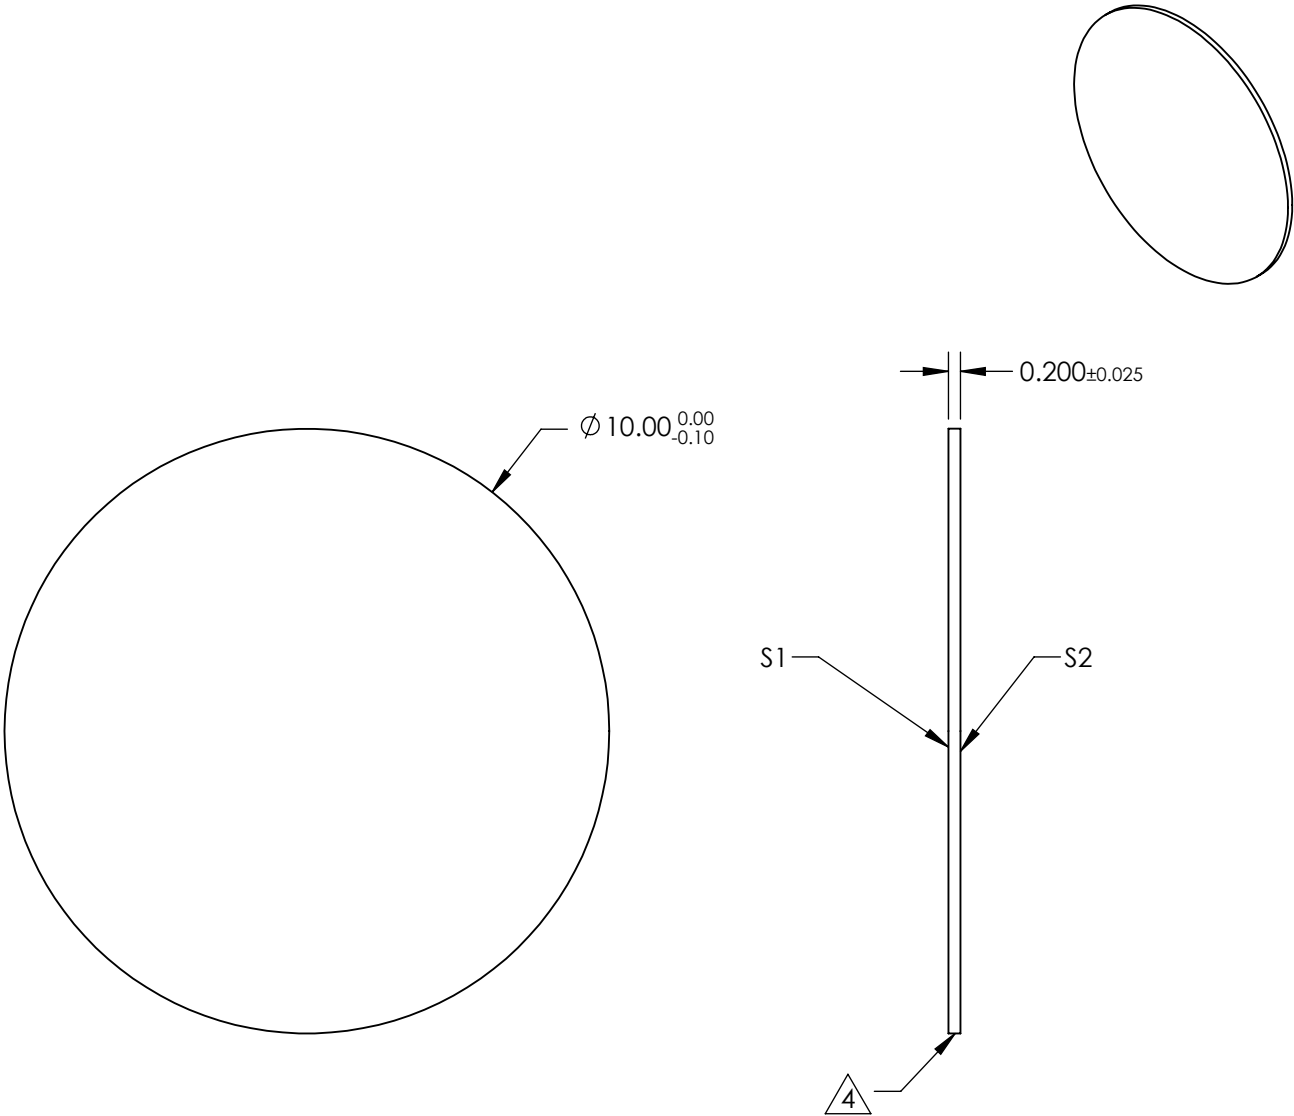


**FOR INFORMATION ONLY:**  
**DO NOT MANUFACTURE**  
**PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
WAVELENGTH RANGE (nm)	400 - 1000	400 - 1000
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE  
PROJECTION



ALL DIMS IN

mm



Edmund Optics®

TITLE

10mm Diameter VIS-NIR Coated, Ultra Thin  
Fused Silica Window

DWG NO

24242

SHEET  
12 OF 15