NOTES:

LASER CLASS: IIIb


2. BEAM DIAMETER: 4.5 (typical)
BEAM DIVERGENCE: <0.5mrad, adjustable


3. MODULATION FREQUENCY: 0.1 - 50 kHz


4. OPERATING TEMPERATURE: +10 to +54°C OPERATING VOLTAGE: 5V (USB POWERED)

5. OUTPUT POWER: 50mW

6. WAVELENGTH: 685 ±10nm



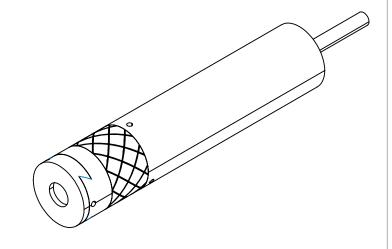

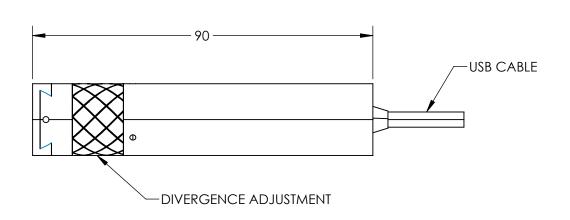

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

THIRD ANGLE PROJECTION		TITLE	Laser USB 685nm 50mW	
ALL DIMS IN	mm	DWG NO	26949	SHEET 1 OF 1