




NOTES:

1. SUBSTRATE:
N-BK7
2. INCIDENT AND REFLECTED BEAMS SHALL BE PARALLEL TO WITHIN 5 ARCSEC
3. COATING (APPLY ACROSS COATING APERTURE)
S1: NONE

S2: VIS-EXT
R(AVG) <0.5% @ 350 - 700nm

4. FINE GRIND SURFACE

5. ROHS: COMPLIANT

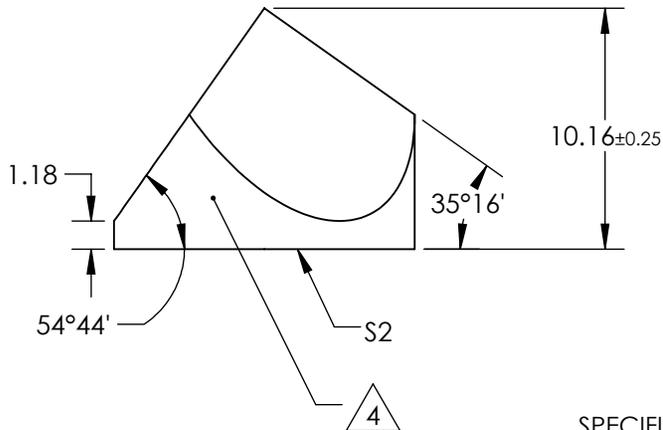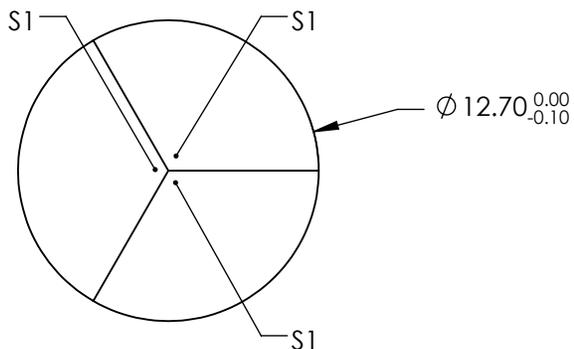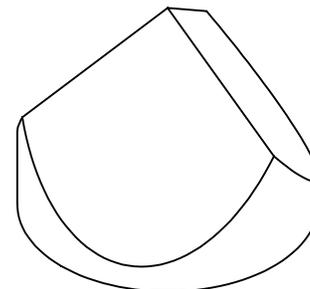

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1 & S2			Edmund Optics®	
SURFACE FLATNESS	$\lambda/8$				
SURFACE QUALITY	60-40	THIRD ANGLE PROJECTION	TITLE	12.7mm VIS-EXT Coated, Corner Cube Prism	
WAVELENGTH RANGE	350 - 700 nm			DWG NO	26964
BEVEL	PROTECTED AS NEEDED	ALL DIMS IN	mm		