




NOTES:

1. SUBSTRATE:
N-BK7
2. INCIDENT AND REFLECTED BEAMS SHALL BE PARALLEL TO WITHIN 5 ARCSEC
3. COATING (APPLY ACROSS COATING APERTURE)
S1: NONE

S2: NIR I
R(AVG) $\leq 0.5\%$ @ 600 - 1050nm



4. FINE GRIND SURFACE

5. ROHS: COMPLIANT

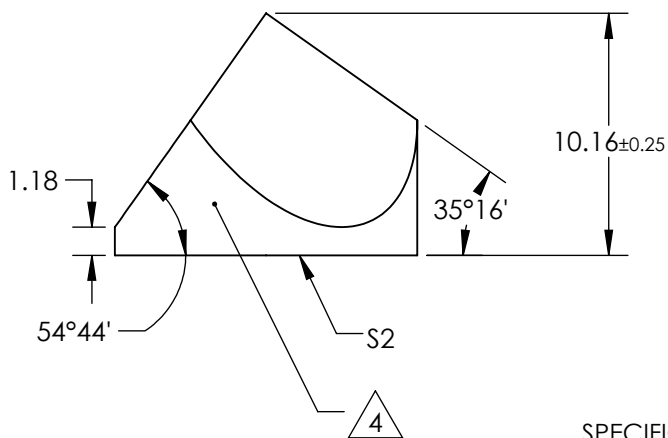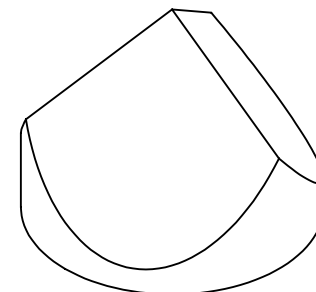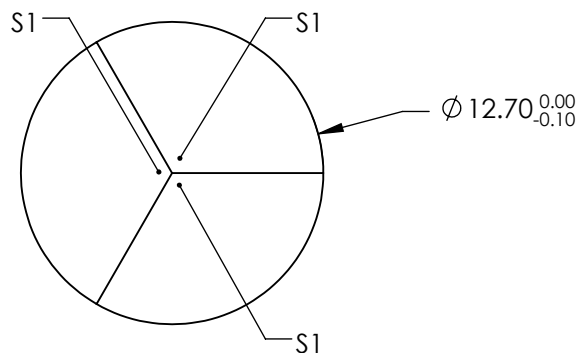

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1 & S2	 Edmund Optics®		
SURFACE FLATNESS	$\lambda/8$	THIRD ANGLE PROJECTION 	TITLE	12.7mm NIR I Coated, Corner Cube Prism
SURFACE QUALITY	60-40			
WAVELENGTH RANGE	600 - 1050 nm	ALL DIMS IN	DWG NO	26967
BEVEL	PROTECTED AS NEEDED	mm		SHEET 1 OF 1